


UltraBright™ Accent Series LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

Our UltraBright™ Accent Series offers full-range dimming, frequent cutpoints, and long run lengths, all while keeping colors in your space true to life. Available in warm to cool white, this seamless line of light's gentle brightness is perfect for accents and decoration in homes and businesses. It's ideal for under cabinet lighting, backlighting, highlighting architectural details and displays, and more.

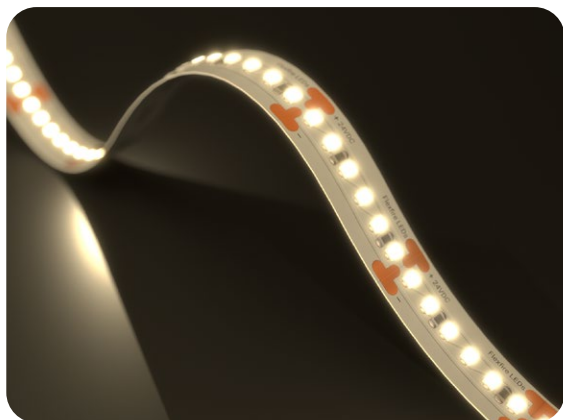

Product Features

Voltage	24V DC
Wattage	3.5 W/ft (11.5 W/m)
Brightness	Up to 300 lm/ft (985 lm/m)
Efficacy	Up to 80 lm/W
CRI	High CRI of up to 97
R9 and R13 Values	High R9 (99) & R13 (98)
Number of LEDs	73 LEDs/ft (240 LEDs/m)
Beam Angle	120°
LED Pitch	3/16" (4 mm)
Strip Width	3/8" (10 mm)
Cutting Points	1" (25 mm)
Max Run Length in Series	49 ft (15 m)
PCB	4 oz Copper
LED Size	2216
Adhesive Type	3M VHB 4930
Ambient Temperature	-4°F to 113°F (-20°C to 45°C)
Operating Temperature	-4°F to 149°F (-20°C to 65°C)
Dimmable	Yes
IP Rating	IP20: Indoor, Dry Location

15 Year
Warranty



**TITLE
24**
REQUIREMENTS



*To be in compliance with Class 2 and our UL Listing, the maximum run length of this strip may not exceed 36 ft (11 m). However, in terms of sheer voltage drop and reduction in brightness, the strip can be run 49 ft (15 m), which would be outside the parameters of our UL certification.

Title 24 is regulated for lamps with color temperatures 4000K and below.

Ordering Code

Brand	-	Series	-	CCT	-	Voltage	-	Length
UB		AT1						
UltraBright™		Accent Series		27K97C: 2700K/CRI 97+ 30K97C: 3000K/CRI 97+ 35K97C: 3500K/CRI 97+ 40K95C: 4000K/CRI 95+ 50K95C: 5000K/CRI 95+		24V 12V*		16FT 32FT 98FT

*12V available via special order.
Example: UB-AT1-27K97C-24V-16FT

Dimensions



Product Specifications

Product SKU	Color* (CCT)	Watts/Foot (Meter)	Lumens/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
UB-AT1-27K97C	2700K	3.5 W/ft (11.5 W/m)	267 lm/ft (877 lm/m)	76	97	105	95
UB-AT1-30K97C	3000K	3.5 W/ft (11.5 W/m)	275 lm/ft (901 lm/m)	78	97	103	96
UB-AT1-35K97C	3500K	3.5 W/ft (11.5 W/m)	281 lm/ft (921 lm/m)	80	97	103	96
UB-AT1-40K95C	4000K	3.5 W/ft (11.5 W/m)	302 lm/ft (990 lm/m)	75	97	102	96
UB-AT1-50K95C	5000K	3.5 W/ft (11.5 W/m)	300 lm/ft (985 lm/m)	80	97	103	96

*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.