


Outdoor UltraBright™ Accent Series LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

Our Outdoor (IP65) UltraBright™ Accent Series offers full-range dimming, frequent cutpoints, and long run lengths, all while ensuring colors stay accurate outside. Its easy-to-clean silicone cover protects it against dust and low-pressure water jets. Available in warm to cool white, its balanced brightness enhances patios, terraces, and decks while adding a refined touch to kitchens, bathrooms, and indoor splash zones.

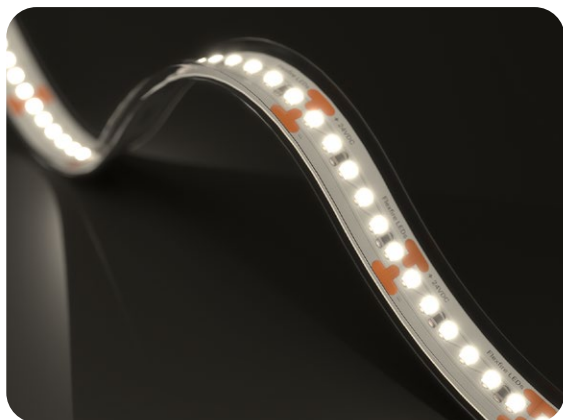

Product Features

Voltage	24V DC
Wattage	3.5 W/ft (11.5 W/m)
Brightness	Up to 300 lm/ft (985 lm/m)
Efficacy	Up to 80 lm/W
CRI	High CRI up to 97
R9 and R13 Values	High R9 (99) & R13 (98)
Number of LEDs	73 LEDs/ft (240 LEDs/m)
Beam Angle	120°
LED Pitch	3/16" (4 mm)
Strip Width	1/2" (12 mm)
Cutting Points	1" (25 mm)
Max Run Length in Series*	49 ft (15 m)
PCB	4 oz Copper
LED Size	2216
Adhesive Type	3M VHB 9495
Ambient Temperature	-4 °F to 113 °F (-20 °C to 45 °C)
Operating Temperature	-4 °F to 149 °F (-20 °C to 65 °C)
Dimmable	Yes
IP Rating	IP65: Outdoor, Wet Location

15 Year
Warranty



**TITLE
24**
REQUIREMENTS



Title 24 is regulated for lamps with color temperatures 4000K and below.

*To be in compliance with Class 2 and our UL Listing, the maximum run length of this strip may not exceed 36 ft (11 m). However, in terms of sheer voltage drop and reduction in brightness, the strip can be run 49 ft (15 m), which would be outside the parameters of our UL certification.

Ordering Code

IP Protection

Brand

Series

CCT

Voltage

Length

IP65

UB

AT1

UltraBright™

Accent Series


27K97C: 2700K/CRI 97+
30K97C: 3000K/CRI 97+
35K97C: 3500K/CRI 97+
40K95C: 4000K/CRI 95+
50K95C: 5000K/CRI 95+

24V
12V*

16FT
32FT

*12V available via special order.
Example: IP65-UB-AT1-27K97C-24V-16FT

Dimensions

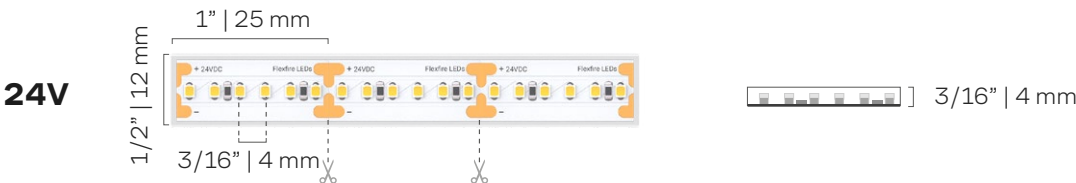

Included Accessories:

Weatherproof
C1 Connector (Female)

Weatherproof
C1 Connector (Male)

Mounting
Bracket

End Cap

End Cap
with holes

Product Specifications

Product SKU	Color* (CCT)	Watts/Foot (Meter)	Lumens/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
IP65-UB-AT1-27K97C	2700K	3.5 W/ft (11.5 W/m)	267 lm/ft (877 lm/m)	76	97	105	95
IP65-UB-AT1-30K97C	3000K	3.5 W/ft (11.5 W/m)	275 lm/ft (901 lm/m)	78	97	103	96
IP65-UB-AT1-35K97C	3500K	3.5 W/ft (11.5 W/m)	281 lm/ft (921 lm/m)	80	97	103	96
IP65-UB-AT1-40K95C	4000K	3.5 W/ft (11.5 W/m)	302 lm/ft (990 lm/m)	75	97	102	96
IP65-UB-AT1-50K95C	5000K	3.5 W/ft (11.5 W/m)	300 lm/ft (985 lm/m)	80	97	103	96

*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.