


Vital™ 300 LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

The Vital™ 300 LED Strip Light is a straightforward and affordable solution designed to meet your space's basic accent lighting needs without cutting corners. Available in warm and cool white, its moderate brightness is ideal for homes and businesses that call for simple yet effective decoration and performance—whether for under-cabinet lighting, backlighting, highlighting architectural details and displays, and more.

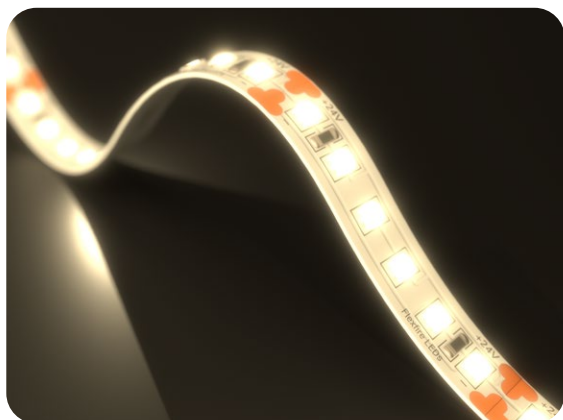

Product Features

Voltage	24V DC
Wattage	3.5 W/ft (3.9 W/m)
Brightness	Up to 303 lm/ft (994 lm/m)
Efficacy	Up to 87 lm/W
CRI	High CRI up to 95
Number of LEDs	36 LEDs/ft (120 LEDs/m)
Beam Angle	120°
LED Pitch	1/4" (7 mm)
Strip Width	3/8" (10 mm)
Cutting Points	2" (50 mm)
Max Run Length in Series	23 ft (7 m)
PCB	2 oz Copper
LED Size	3528
Adhesive Type	3M VHB 4930
Ambient Temperature	-4°F to 104°F (-20°C to 40°C)
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Dimmable	Yes
IP Rating	IP20: Indoor, Dry Location

7 Year
Warranty



Ordering Code

Series

-

Color Temp.

-

Voltage

-

Length

VL 30

Vital™

30K: 3000K
50K: 5000K

24V

16FT
100FT

Example: VL30-30K-24V-16FT

Dimensions



Product Specifications

Product SKU	Color* (CCT)	Watts/Foot (Meter)	Lumen/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
VL30-30K	3000K	3.5 W/ft (11.4 W/m)	302 lm/ft (990 lm/m)	86	93	99	90
VL30-50K	5000K	3.5 W/ft (11.4 W/m)	303 lm/ft (994 lm/m)	87	95	98	88

Complete Your Setup



✓ Drivers



✓ Controllers & Dimmers



✓ Connectors



✓ Extrusions

Compatible Drivers (24V)

Non-dimmable

Power Supply	Diagram	LED Strip Length	Product SKU	Watts	Class 2
Plug-In Power Supply Plug-and-Play Power Supply		1-5 ft	24V-WMPS2-1	24W	X
		6-21 ft	24V-DPS2-4	96W	X
Mean Well™ HLG Hardwired Power Supply		1-15 ft	HLG-60H-24A	60W	X
		16-24 ft	HLG-100H-24A	96W	X
		25-47 ft	HLG-185H-24A	185W	
		48-82 ft	HLG-320H-24A	320W	
		83-154 ft	HLG-600H-24A	600W	
Mean Well™ LPV Hardwired Power Supply		1 - 14 ft	LPV-60-24	60W	X

Dimmable

Power Supply	Diagram	LED Strip Length	Product SKU	Watts	Class 2
Zurik® EMLV Hardwired Power Supply		1-7 ft	ZRK-EMLV2-30W-24VDC	30W	X
		8-15 ft	ZRK-EMLV2-60W-24VDC	60W	X
Zurik® Universal Hardwired Power Supply		1-7 ft	ZRK-UNV-30W-24VDC	30W	X
		8-15 ft	ZRK-UNV-60W-24VDC	60W	X
		16-24 ft	ZRK-UNV-96W-24VDC	96W	X
		25-30 ft	ZRK-UNV-120W-24VDC	120W	
		31-51 ft	ZRK-UNV-200W-24VDC	200W	
		52-77 ft	ZRK-UNV-300W-24VDC	300W	
		1-96 ft (up to 24 ft/output)	ZRK-UNV-C384W-24VDC	384W	X
Lutron® Hi-Lume™ Premier Hardwired Power Supply		1 - 24 ft	L3D0-96W24V-U	96W	X
		Dimming Range: 0.1-100%			

[See Power Supplies Selector](#)


Compatible Controllers & Dimmers



Handheld Remotes








Wall Dimmers




Smart Home Controllers

[See Controllers and Dimmers](#)

Compatible Strip Light Connectors

Product SKU	Diagram	Description	Wire Gauge	Amperage Limit*
GRIP-SC-C1-10-0		Connector with no wire to attach the strip to wire.	-	5 Amps
GRIP-SC-C1-10-12		Connector with 12" or 36" of wire to attach the strip to a power supply or low voltage control.	22 AWG	
GRIP-SC-C1-10-36				
GRIP-SC-C2-10-06		Jumper connector with 6" of wire to attach two sections of strip together. Wire allows to go around tight corners.		
GRIP-SC-C3-10-0		Jumper connector with no wire to attach sections of strip together in a continuous run.	-	
GRIP-SC-CNR-10-5		Corner connector for 90 degree turns.		

*Make sure no more than 5 amps are drawn after any solderless connector. Calculate max length of strip light to follow the solderless connector based on an amperage draw of 0.29 A/ft (0.96 A/m) at 12 volts, 0.15 A/ft (0.48 A/m) at 24 volts.

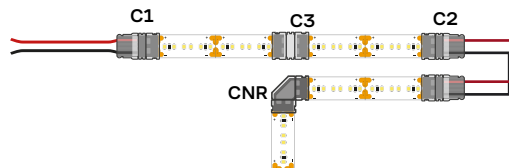










Strip Light Connectors Installation

- Peel off 1/4" of the 3M adhesive (both the tape and release paper) from the end of the strip that you want to connect. It must be removed to allow it to fit properly with the solderless connector.
- Check the polarity of the strip to match the positive (+) markings together and negative (-) markings together. If you accidentally close the connector before you're ready, use a small flathead screwdriver to pry the top back open.
- Open the top of the grip connector and insert the LED strip inside. Make sure the LED strip is facing up towards the translucent top and the solder pads are directly above the small hooks on the connector.
- Once everything is in order, use pliers to close and lock the connector. You'll hear a "click" sound when it is properly closed.


NOTE: Soldering is the preferred method. If you need further assistance, please download our Solderless Connector Installation Guide from our website.

Compatible Aluminum Channel Kits

Diagram	Name	Type	Channel Kit Description	Kit SKU	Included Accessories
	Ion™	 Surface Mount	1 Meter Ion Channel	ION-CH-A-1M	
	Gemini™	 Surface Mount	1 Meter Channel + Clear Cover Kit	GEM-CH-A-CVR-C-1M	2 Open End Caps 2 Closed End Caps 4 Mounting Clips
			2 Meter Channel + Clear Cover Kit	GEM-CH-A-CVR-C-2M	
			1 Meter Channel + Frosted Cover Kit	GEM-CH-A-CVR-F-1M	
			2 Meter Channel + Frosted Cover Kit	GEM-CH-A-CVR-F-2M	
			1 Meter Channel + Matte Cover Kit	GEM-CH-A-CVR-M-1M	
			2 Meter Channel + Matte Cover Kit	GEM-CH-A-CVR-M-2M	
	Kepler™	 Surface Mount	1 Meter Channel + Clear Cover Kit	KEP-CH-A-CVR-C-1M	2 Open End Caps 2 Closed End Caps 4 Mounting Clips
			1 Meter Channel + Frosted Cover Kit	KEP-CH-A-CVR-F-1M	
			1 Meter Channel + Matte Cover Kit	KEP-CH-A-CVR-M-1M	
			Note: Compatible only without connectors.		
	Laika™	 Surface Mount	1 Meter Channel + Clear Cover Kit	LAI-CH-A-CVR-C-1M	2 Open End Caps 2 Closed End Caps 4 Mounting Clips
			1 Meter Channel + Frosted Cover Kit	LAI-CH-A-CVR-F-1M	
			2 Meter Channel + Frosted Cover Kit	LAI-CH-A-CVR-F-2M	
			Note: Compatible only without connectors.		
	Titan™	 Surface Mount	1 Meter Channel + Clear Cover Kit	TTN-CH-A-CVR-C-1M	2 Open End Caps 2 Closed End Caps 4 Mounting Clips
			1 Meter Channel + Frosted Cover Kit	TTN-CH-A-CVR-F-1M	
			2 Meter Channel + Frosted Cover Kit	TTN-CH-A-CVR-F-2M	
			1 Meter Channel + Matte Cover Kit	TTN-CH-A-CVR-M-1M	
			2 Meter Channel + Matte Cover Kit	TTN-CH-A-CVR-M-2M	6 Channel Connectors
			1 Meter Channel + 10 Meter Frosted Cover Kit	TTN-CH-A-CVR-F-10MR	10 Open End Caps 10 Closed End Caps 20 Mounting Clips 30 Channel Connectors
			1 Meter Channel + 10 Meter Matte Cover Kit	TTN-CH-A-CVR-M-10MR	
			1 Pendant Kit	TTN-PND-KIT	2 Pendant Mounts with Screws
				Atlas™	 Angled Surface Mount
1 Meter Channel + Frosted Cover Kit	ATL-CH-A-CVR-F-1M				
2 Meter Channel + Frosted Cover Kit	ATL-CH-A-CVR-F-2M				
1 Meter Channel + Matte Cover Kit	ATL-CH-A-CVR-M-1M				
2 Meter Channel + Matte Cover Kit	ATL-CH-A-CVR-M-2M				
	Calypso™	 Recessed	1 Meter Channel + Frosted Cover Kit	CAL-CH-A-CVR-F-1M	2 Open End Caps 2 Closed End Caps 4 Mounting Clips
			2 Meter Channel + Frosted Cover Kit	CAL-CH-A-CVR-F-2M	
			1 Meter Channel + Matte Cover Kit	CAL-CH-A-CVR-M-1M	
			2 Meter Channel + Matte Cover Kit	CAL-CH-A-CVR-M-2M	
			1 Meter Channel + 10 Meter Frosted Cover Kit	CAL-CH-A-CVR-F-10MR	10 Open End Caps 10 Closed End Caps 20 Mounting Clips 30 Channel Connectors
			1 Meter Channel + 10 Meter Matte Cover Kit	CAL-CH-A-CVR-M-10MR	
	Cassini™	 Recessed	1 Meter Channel + Clear Cover Kit	CAS-CH-A-CVR-C-1M	2 Open End Caps 2 Closed End Caps 4 Mounting Clips
			1 Meter Channel + Frosted Cover Kit	CAS-CH-A-CVR-F-1M	
			2 Meter Channel + Frosted Cover Kit	CAS-CH-A-CVR-F-2M	
			1 Meter Channel + Matte Cover Kit	CAS-CH-A-CVR-M-1M	
			2 Meter Channel + Matte Cover Kit	CAS-CH-A-CVR-M-2M	

Wiring Diagrams


120V Wall Dimmer

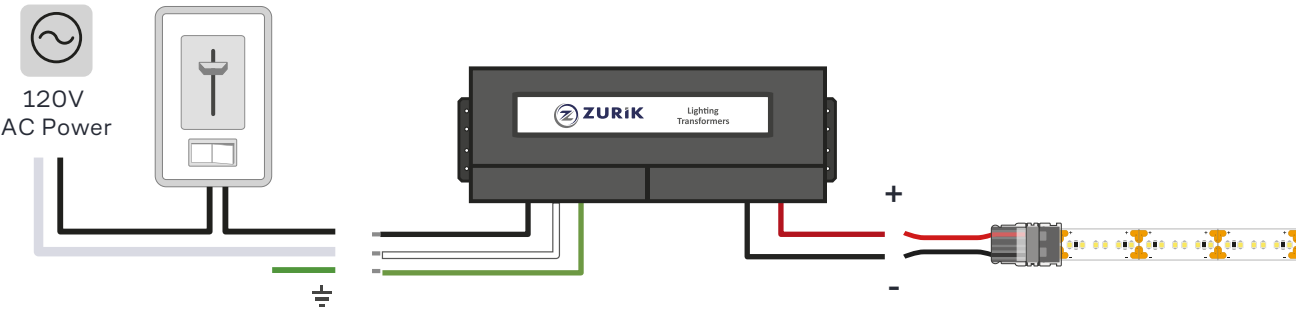

Input		
● Green	⏏	Ground Wire
● Black	L	Line (hot)
○ White	N	Neutral

Output		
● Red	+	Positive
● Black	-	Negative

In-Line Dimming

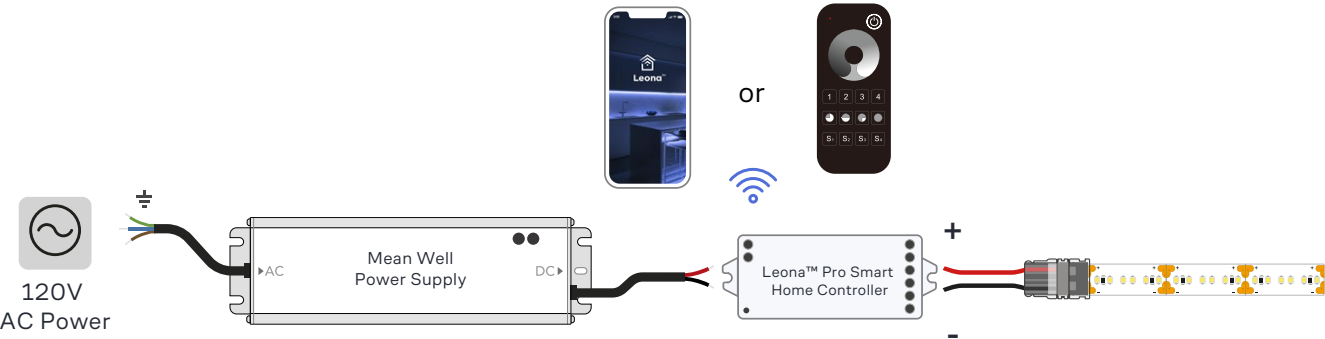

Input		
● Green/Yellow	⏏	Ground Wire
● Brown	L	Line (hot)
● Blue	N	Neutral

Output		
● Red	+	Positive
● Black	-	Negative

Safety And Disclosures

- 01.** Installation must comply with local and national electrical codes. A qualified, licensed electrician should install your strips for safety and proper installation.
- 02.** To meet UL requirements, only install with a Class 2 DC Constant Voltage LED driver.
- 03.** Do not install in an environment where excessive heat may exist.
- 04.** LED strip lights must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
- 05.** Do not secure this product with any kind of staples, nails, or materials that could potentially damage the product in any way. Keep these instructions for future reference.
- 06.** Do not cover this product with any kind of combustible material such as paper, fabrics, etc.
- 07.** Do not install with the majority of the product being unsupported. Allowing the product to be suspended or dangling while installing may cause damage to the PCB due to the weight of the strip.
- 08.** Do not install indoor LED tape light products in outdoor/wet location environments. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
- 09.** Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
- 10.** Make sure the appropriate gauge wire is installed between the driver, LEDs, and any dimmers. When choosing wire, calculate voltage drop, maximum amperage rating, and the location ratings on the wire. Improper wire selection and installation could overheat the wires and cause a fire.
- 11.** Do not modify the product beyond the instructions, or the warranty will be void.
- 12.** We reserve the right to modify and improve the design of our fixtures without prior notice. Although we try our best to order the same colors every time, we cannot guarantee that existing installed fixtures will match subsequent orders or replacements regarding product appearance, CCT, or lumen output due to changes in technology and phosphors over time

Warranty Information

Limited Warranty


This product has a 7-year limited warranty from the date of shipment. This warranty only includes the main product outlined in this specification sheet and does not include the additional accessories that are used as a reference. Complete warranty details for fixtures and additional accessories are available at <https://www.flexfireleds.com/warranties/> within the Policies section. For warranty related questions, please, contact the product support team at support@flexfireleds.com.


Consumer's Acknowledgment

Flexfire LEDs, Inc. stands behind its products when they are used properly and according to our specifications. When you purchase our products, you are agreeing to the terms and conditions outlined in our warranty section. We try our best to make recommendations, but the burden of proper installation, design, and maintenance relies on the purchaser. This limited warranty does not include product failures that are the result of: Connecting LED products to the wrong output voltage; Improper connection of power, LED products, or controls; Connecting LED products or controls directly to any AC power source if they are stated for DC only input; Connecting power backwards to an AC power source; Products used in an inappropriate location or in environmental conditions (temperature, humidity, moisture, etc.) outside the normal specified range; Water damage to products not specifically sold as waterproof products; Electrical power surges and spikes; Damage from hail, flooding, tornado, fire, wind, earthquake, lightning, electrical storm, or any other natural disasters or "force majeure" incidences; Damage caused by a vehicle or other accident; Damage caused when transporting the item; Damage to any products that were modified by the user, used for purposes other than as intended or directed, or connected to LED systems or components not purchased from Flexfire LEDs; Products that have been subjected to misuse, mishandling, misapplication or accident. Products used in connection with any components, devices or systems other than those explicitly approved as compatible with Company's products and listed on Company's website. Excessive wear and tear and/or physical or accidental abuse, loss, or theft. Improper repairs or warranty services performed by someone other than Flexfire LEDs will void this warranty.



www.flexfireleds.com

 Toll Free Number: 1-844-353-9347

 Local Number: (925) 273-9080

 info@flexfireleds.com