


UltraBright™ Accent Tunable White LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

Our UltraBright™ Accent Tunable White Series delivers full-range dimming and keeps colors in your space true to life. Pair it with a control system to shift smoothly between warm and cool whites. With a human-centric design, it syncs with your natural rhythm and enhances moods and well-being. This seamless line of light offers medium brightness for highlighting and decoration.

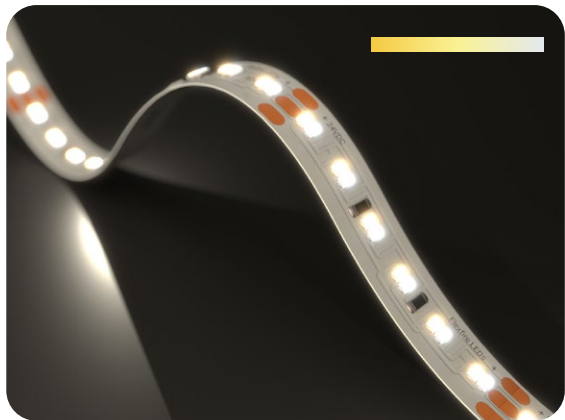

15 Year
Warranty



Product Features

Color Temperature Range	2700K-6200K
Voltage	24V DC
Wattage	3.5 W/ft (11.5 W/m)
Brightness	Up to 277 lm/ft (909 lm/m)
Efficacy	Up to 81 lm/W
CRI	High CRI of 95
Number of LEDs	73 LEDs/ft (240 LEDs/m)
Beam Angle	120°
LED Pitch	3/16" (5 mm)
Strip Width	3/8" (10 mm)
Cutting Points	2" (50 mm)
Max Run Length in Series	49 ft (15 m)
PCB	4 oz Copper
LED Size	2216
Adhesive Type	3M VHB 4930
Ambient Temperature	-4°F to 113°F (-20°C to 45°C)
Operating Temperature	-4°F to 149°F (-20°C to 65°C)
Dimmable	Yes
IP Rating	IP20: Indoor, Dry Location

Ordering Code

Brand

Series

CCT

Voltage

Length

UB

AT1

DYN276295C

24V

UltraBright™

Accent Series

2700K-6200K/CRI 95+

24V

16FT
98FT

Example: UB-AT1-DYN276295C-24V-16FT

Dimensions



Product Specifications

Product SKU	Color* (CCT)	Watts/Foot (Meter)	Lumens/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
UB-AT1-DYN276295C	All channels	3.5 W/ft (11.5 W/m)	277 lm/ft (909 lm/m)	81 lm/W	95	105	95
	2700K	1.7 W/ft (5.7 W/m)	134 lm/ft (439 lm/m)	79 lm/W	98	102	96
	6200K	1.7 W/ft (5.7 W/m)	145 lm/ft (475 lm/m)	85 lm/W	96	104	95

*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.