


# UltraBright™ Industrial Series LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

Our UltraBright™ Industrial Series is our boldest LED strip. With near-perfect color accuracy, its intense power stays steady and consistent, replacing shadows or uneven spots with impactful, seamless lines of light. Available in warm to cool white, it's a top, high-impact choice for warehouses, signage, edge lighting, and premium hospitality, along with home spaces that call for maximum brightness.

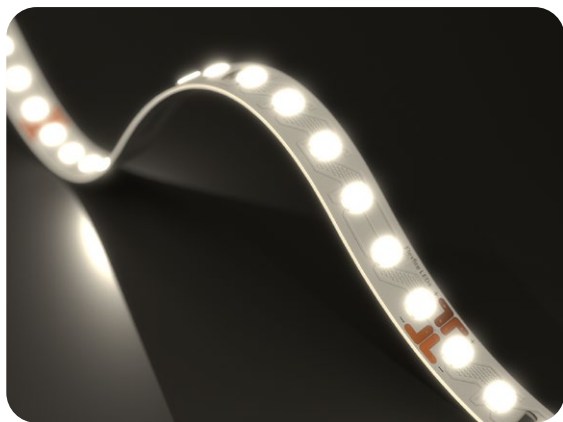

## Product Features

|                                 |                               |
|---------------------------------|-------------------------------|
| <b>Voltage</b>                  | 24V DC                        |
| <b>Wattage</b>                  | 6.6 W/ft (21.7 W/m)           |
| <b>Brightness</b>               | Up to 1019 lm/ft (3344 lm/m)  |
| <b>Efficacy</b>                 | Up to 147 lm/W                |
| <b>CRI</b>                      | High CRI of up to 94          |
| <b>R9 and R13 Values</b>        | High R9 (83) and R13 (97)     |
| <b>Number of LEDs</b>           | 36 LEDs/ft (120/m)            |
| <b>Beam Angle</b>               | 120°                          |
| <b>LED Pitch</b>                | 5/16" (8 mm)                  |
| <b>Strip Width</b>              | 3/8" (10 mm)                  |
| <b>Cutting Points</b>           | 2 5/8" (66 mm)                |
| <b>Max Run Length in Series</b> | 20 ft (6 m)                   |
| <b>PCB</b>                      | 4 oz Copper                   |
| <b>LED Size</b>                 | 2835                          |
| <b>Adhesive Type</b>            | 3M VHB 4930                   |
| <b>Ambient Temperature</b>      | -4°F to 113°F (-20°C to 45°C) |
| <b>Operating Temperature</b>    | -4°F to 149°F (-20°C to 65°C) |
| <b>Dimmable</b>                 | Yes                           |
| <b>IP Rating</b>                | IP20: Indoor, Dry Location    |

7 Year  
Warranty



Ordering Code

Brand

Series

CCT

Voltage

Length

UB

IS

UltraBright™

Industrial Series

30K90C: 3000K/CRI 90+

35K90C: 3500K/CRI 90+

40K90C: 4000K/CRI 90+

50K90C: 5000K/CRI 90+

62K90C: 6200K/CRI 90+

24V


12V\*

16FT

98FT

\*12V available via special order.  
Example: UB-IS-30K90C-24V-16FT

Dimensions

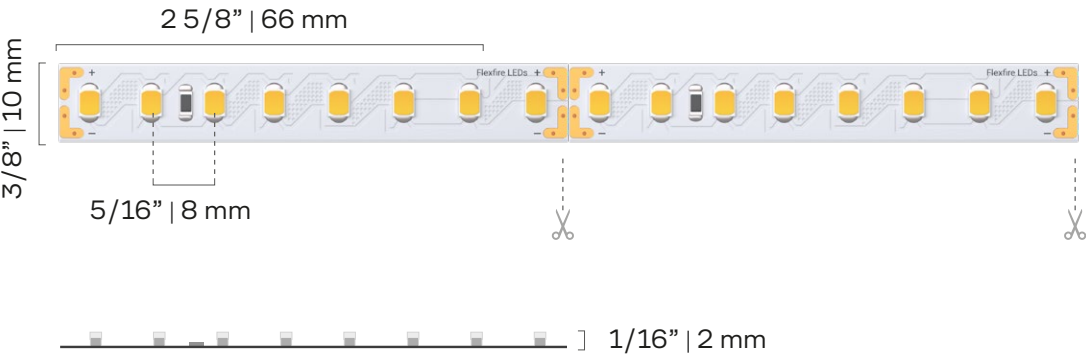

Product Specifications

| Product SKU  | Color*<br>(CCT) | Watts/Foot<br>(Meter)  | Lumens/Foot<br>(Meter)    | Luminous<br>Efficacy<br>(Lumens/Watt) | CRI | Gamut<br>Score<br>(Rg) | Relative<br>Fidelity<br>Score (Rf) |
|--------------|-----------------|------------------------|---------------------------|---------------------------------------|-----|------------------------|------------------------------------|
| UB-IS-30K90C | 3000K           | 6.6 W/ft<br>(21.7 W/m) | 930 lm/ft<br>(3051 lm/m)  | 135 lm/W                              | 93  | 100                    | 92                                 |
| UB-IS-35K90C | 3500K           | 6.6 W/ft<br>(21.7 W/m) | 1019 lm/ft<br>(3344 lm/m) | 147 lm/W                              | 94  | 99                     | 90                                 |
| UB-IS-40K90C | 4000K           | 6.6 W/ft<br>(21.7 W/m) | 1007 lm/ft<br>(3305 lm/m) | 144 lm/W                              | 94  | 98                     | 89                                 |
| UB-IS-50K90C | 5000K           | 6.6 W/ft<br>(21.7 W/m) | 1002 lm/ft<br>(3288 lm/m) | 144 lm/W                              | 94  | 97                     | 87                                 |
| UB-IS-62K90C | 6200K           | 6.6 W/ft<br>(21.7 W/m) | 991 lm/ft<br>(3251 lm/m)  | 144 lm/W                              | 94  | 98                     | 88                                 |

\*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.