
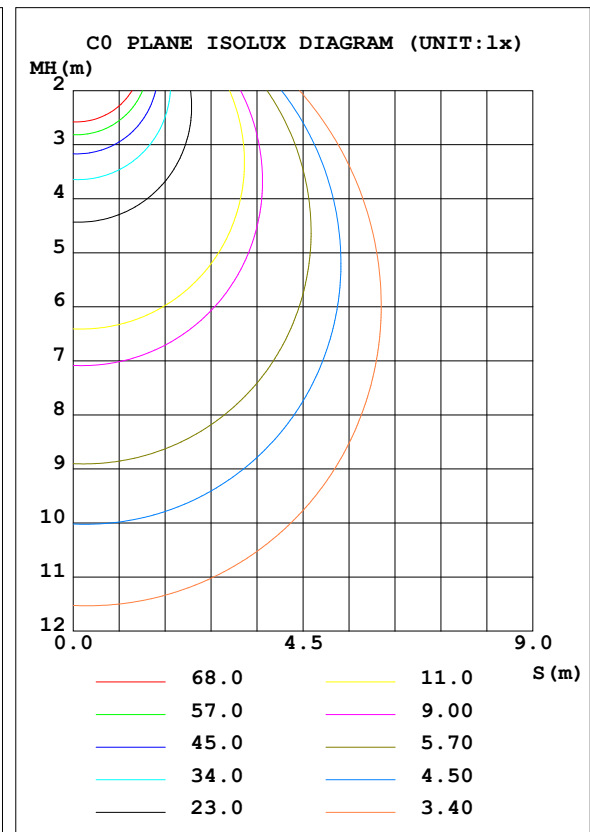


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm		
NAME: LST-RGB	TYPE: LED Sheet	WEIGHT:
SPEC.: 60W	DIM.: 480*240 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.24*0.48	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 70.64 lm/W			
MODEL		I <sub>max</sub> (cd)	468.6	S/MH (C0/180)	1.26
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)		TOTAL FLUX (lm)	1416.3	η UP, DN (C0-180)	0.3, 58.3
NOMINAL FLUX (lm)	1416.24	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 41.1
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)		η down (%)	99.4	CIBSE SHR MAX	1.50

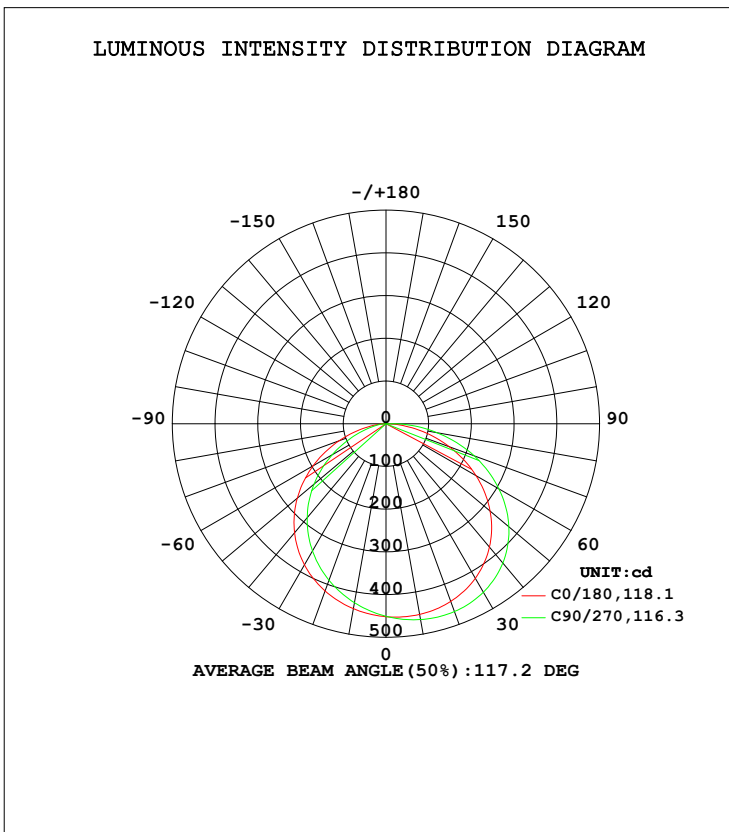

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2024-08-01

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

**ZONAL FLUX DIAGRAM**
**ZONAL FLUX DIAGRAM:**


$\gamma$	C0	C90	C180	C270				$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	453.2	465.4	439.6	425.5				0- 10	42.82	42.82	3.02,3.02
20	442.7	467.9	416.7	390.1				10- 20	124.1	166.9	11.8,11.8
30	418.0	455.6	381.6	344.1				20- 30	192.0	358.9	25.3,25.3
40	376.8	425.4	333.1	287.2				30- 40	237.5	596.4	42.1,42.1
50	318.2	375.3	271.0	219.9				40- 50	252.7	849.1	59.9,60
60	243.6	305.2	196.9	145.4				50- 60	233.0	1082	76.4,76.4
70	158.1	219.7	117.3	73.90				60- 70	180.8	1263	89.2,89.2
80	70.44	121.6	43.23	24.08				70- 80	108.3	1371	96.8,96.8
90	6.148	23.50	2.509	0.5547				80- 90	36.75	1408	99.4,99.4
100	0.5357	0.4064	0.6901	0.6893				90-100	1.809	1410	99.5,99.5
110	0.6402	0.5790	0.9980	0.9972				100-110	0.7248	1411	99.6,99.6
120	0.9476	0.8130	1.318	1.330				110-120	0.9379	1411	99.7,99.7
130	1.182	1.060	1.589	1.527				120-130	1.090	1413	99.7,99.7
140	1.416	1.318	1.811	1.729				130-140	1.134	1414	99.8,99.8
150	1.675	1.552	1.983	1.897				140-150	1.048	1415	99.9,99.9
160	1.823	1.811	2.106	1.971				150-160	0.8543	1416	99.9,100
170	1.963	1.996	2.138	2.122				160-170	0.5646	1416	100,100
180	2.131	2.118	2.143	2.131				170-180	0.1993	1416	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-08-01

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm		
NAME: LST-RGB	TYPE: LED Sheet	WEIGHT:
SPEC.: 60W	DIM.: 480*240 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.24*0.48	Shielding Angle: 120

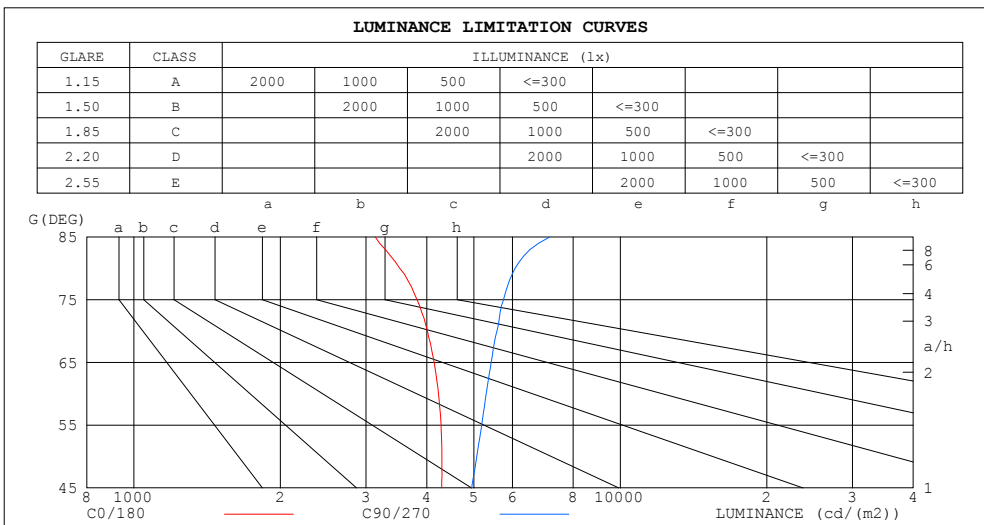

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3134	7162
80	3521	6076
75	3820	5754
70	4013	5576
65	4142	5426
60	4228	5299
55	4279	5188
50	4297	5068
45	4293	4947


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2024-08-01

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm		
NAME: LST-RGB	TYPE: LED Sheet	WEIGHT:
SPEC.: 60W	DIM.: 480*240 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.24*0.48	Shielding Angle: 120

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.99
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.89	.86	.84	.82
2.0	.89	.82	.76	.87	.81	.75	.84	.78	.73	.80	.76	.72	.77	.73	.70	.68
3.0	.78	.70	.63	.76	.69	.62	.73	.67	.61	.71	.65	.60	.68	.63	.59	.57
4.0	.69	.60	.53	.68	.59	.53	.65	.58	.52	.63	.56	.51	.60	.55	.50	.48
5.0	.61	.52	.45	.60	.52	.45	.58	.50	.45	.56	.49	.44	.54	.48	.43	.41
6.0	.55	.46	.39	.54	.46	.39	.52	.45	.39	.51	.44	.38	.49	.43	.38	.36
7.0	.50	.41	.35	.49	.41	.35	.47	.40	.34	.46	.39	.34	.45	.38	.34	.32
8.0	.45	.37	.31	.45	.36	.31	.43	.36	.31	.42	.35	.30	.41	.35	.30	.28
9.0	.42	.33	.28	.41	.33	.28	.40	.33	.27	.39	.32	.27	.38	.32	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.30	.25	.36	.29	.25	.35	.29	.25	.23

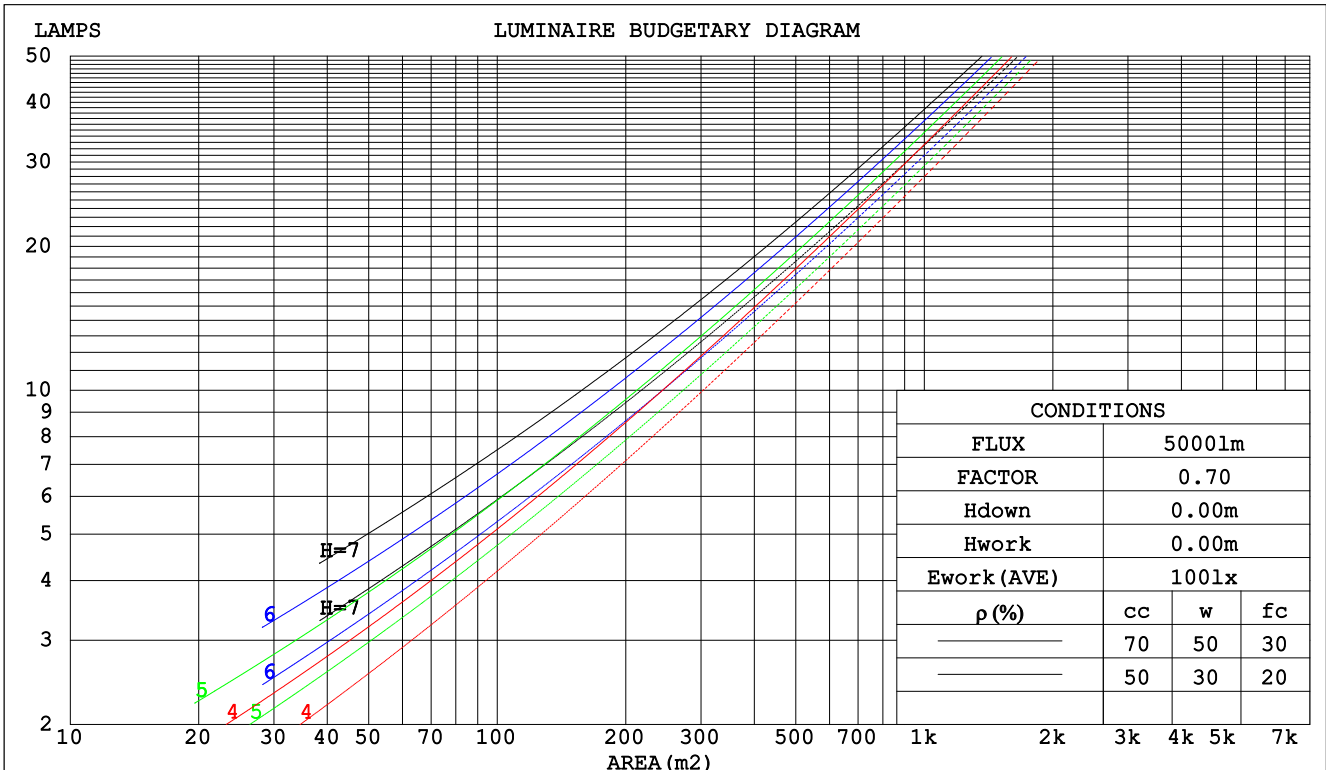

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-08-01

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm														
NAME: LST-RGB					TYPE: LED Sheet					WEIGHT:				
SPEC.: 60W					DIM.: 480*240 (MM)					SERIAL No.: 001				
MFR.: Flexfire LEDs, Inc.					SUR.: 0.24*0.48					Shielding Angle: 120				

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.323	.184	.058	.316	.180	.057	.302	.173	.055	.290	.167	.054	.278	.161	.052	
2.0	.301	.165	.051	.294	.162	.050	.282	.157	.049	.271	.152	.048	.261	.148	.047	
3.0	.277	.147	.044	.271	.145	.044	.261	.141	.043	.251	.137	.042	.241	.134	.041	
4.0	.255	.132	.039	.250	.131	.039	.240	.127	.038	.231	.124	.037	.223	.121	.037	
5.0	.235	.120	.035	.230	.118	.034	.222	.115	.034	.214	.113	.034	.207	.110	.033	
6.0	.217	.109	.031	.213	.108	.031	.206	.105	.031	.199	.103	.030	.192	.101	.030	
7.0	.202	.100	.028	.198	.099	.028	.192	.097	.028	.185	.095	.028	.179	.093	.027	
8.0	.188	.092	.026	.185	.091	.026	.179	.089	.026	.173	.088	.025	.168	.086	.025	
9.0	.176	.085	.024	.173	.084	.024	.168	.083	.024	.163	.082	.023	.158	.080	.023	
10.0	.166	.079	.022	.163	.079	.022	.158	.077	.022	.153	.076	.022	.149	.075	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.186	.161	.138	.159	.138	.119	.109	.095	.082	.063	.055	.048	.020	.018	.015	
2.0	.178	.136	.101	.152	.117	.088	.105	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.170	.119	.078	.146	.103	.068	.100	.071	.047	.058	.042	.028	.019	.014	.009	
4.0	.163	.106	.062	.140	.091	.054	.096	.064	.038	.056	.037	.022	.018	.012	.007	
5.0	.155	.095	.051	.133	.083	.044	.092	.058	.031	.053	.034	.019	.017	.011	.006	
6.0	.148	.087	.043	.127	.075	.038	.088	.053	.027	.051	.031	.016	.016	.010	.005	
7.0	.141	.080	.037	.121	.070	.033	.084	.049	.023	.049	.029	.014	.016	.009	.005	
8.0	.135	.074	.033	.116	.065	.029	.080	.045	.020	.047	.027	.012	.015	.009	.004	
9.0	.129	.069	.030	.111	.060	.026	.077	.042	.018	.045	.025	.011	.014	.008	.004	
10.0	.123	.065	.027	.106	.057	.023	.073	.040	.017	.043	.024	.010	.014	.008	.003	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-08-01

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm										
NAME: LST-RGB			TYPE: LED Sheet			WEIGHT:				
SPEC.: 60W			DIM.: 480*240 (MM)			SERIAL No.: 001				
MFR.: Flexfire LEDs, Inc.			SUR.: 0.24*0.48			Shielding Angle: 120				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.3	18.9	17.6	19.1	19.3	18.2	19.7	18.4	19.9	20.1
3H	19.0	20.4	19.3	20.7	20.9	20.2	21.6	20.5	21.8	22.1
4H	19.7	21.0	20.0	21.3	21.6	21.1	22.4	21.4	22.7	23.0
6H	20.2	21.5	20.5	21.7	22.0	21.9	23.2	22.2	23.5	23.8
8H	20.3	21.6	20.7	21.9	22.2	22.2	23.5	22.6	23.8	24.1
12H	20.4	21.6	20.8	21.9	22.3	22.5	23.7	22.9	24.0	24.4
4H 2H	18.2	19.5	18.5	19.8	20.1	18.8	20.1	19.1	20.4	20.7
3H	20.0	21.2	20.4	21.5	21.8	21.0	22.2	21.3	22.5	22.8
4H	20.8	21.9	21.2	22.3	22.6	22.0	23.1	22.4	23.5	23.8
6H	21.5	22.4	21.9	22.8	23.2	23.0	24.0	23.4	24.3	24.7
8H	21.7	22.6	22.1	23.0	23.4	23.4	24.3	23.8	24.7	25.1
12H	21.8	22.7	22.3	23.1	23.5	23.8	24.6	24.2	25.0	25.5
8H 4H	21.3	22.2	21.7	22.6	23.0	22.3	23.2	22.7	23.6	24.0
6H	22.1	22.9	22.6	23.3	23.7	23.5	24.2	23.9	24.6	25.1
8H	22.5	23.1	22.9	23.6	24.0	24.0	24.7	24.5	25.1	25.6
12H	22.7	23.3	23.2	23.7	24.2	24.5	25.1	25.0	25.6	26.1
12H 4H	21.4	22.2	21.8	22.6	23.0	22.3	23.2	22.8	23.6	24.0
6H	22.3	22.9	22.7	23.4	23.8	23.5	24.2	24.0	24.7	25.1
8H	22.7	23.2	23.2	23.7	24.2	24.1	24.7	24.6	25.2	25.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
2.0H	+ 0.2 / - 0.4					+ 0.1 / - 0.3				

CIE Pub.117, 1416 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.2)  
 Area: 0.1152 m2

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-08-01

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm		
NAME: LST-RGB	TYPE: LED Sheet	WEIGHT:
SPEC.: 60W	DIM.: 480*240 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.24*0.48	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	37	30
0.80	66	54	47	65	54	46	63	53	46	39
1.00	75	63	56	73	62	55	71	64	55	47
1.25	82	71	63	80	70	63	77	69	62	55
1.50	87	77	69	85	76	69	82	74	68	60
2.00	94	85	78	92	84	77	88	81	76	68
2.50	98	90	83	96	88	83	92	86	81	72
3.00	101	94	88	99	93	87	95	89	85	76
4.00	105	99	95	103	98	93	99	94	90	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-08-01

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm		
NAME: LST-RGB	TYPE: LED Sheet	WEIGHT:
SPEC.: 60W	DIM.: 480*240 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.24*0.48	Shielding Angle: 120

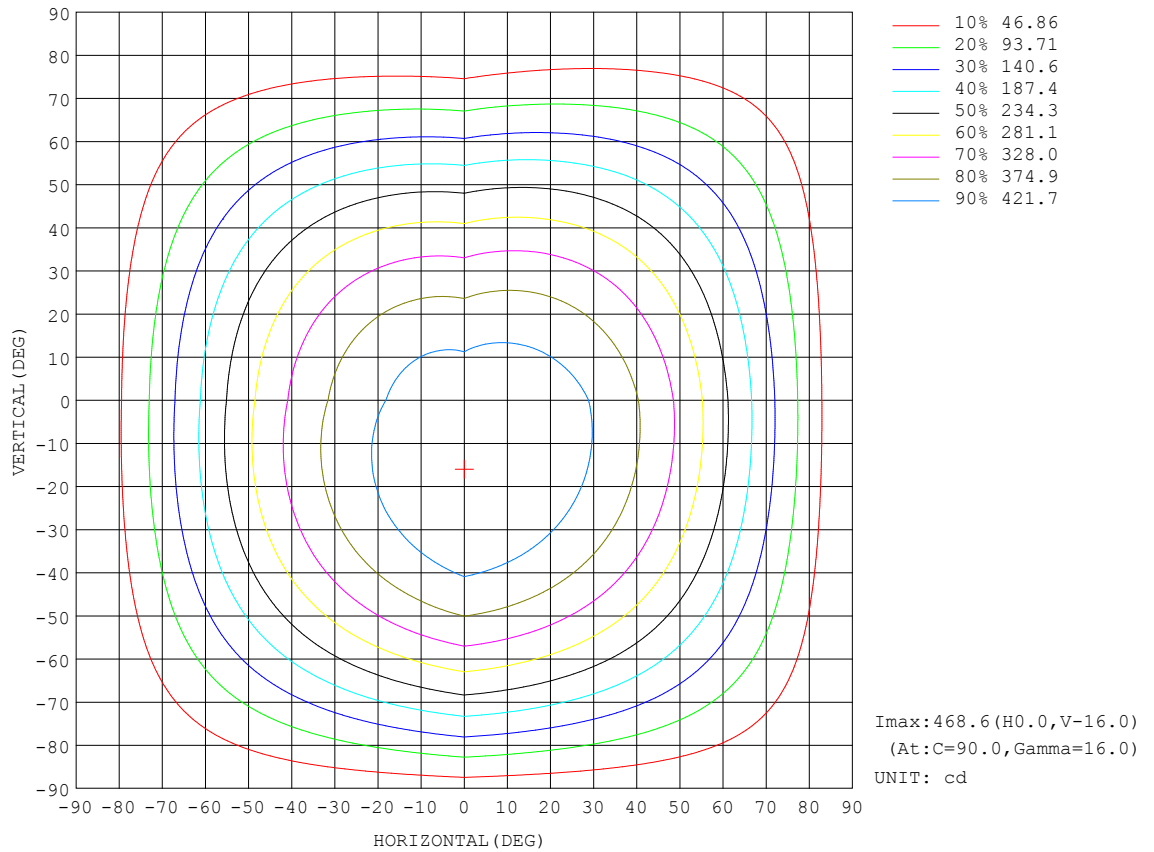

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2024-08-01


γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm		
NAME: LST-RGB	TYPE: LED Sheet	WEIGHT:
SPEC.: 60W	DIM.: 480*240 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.24*0.48	Shielding Angle: 120

Flux out:1061 lm

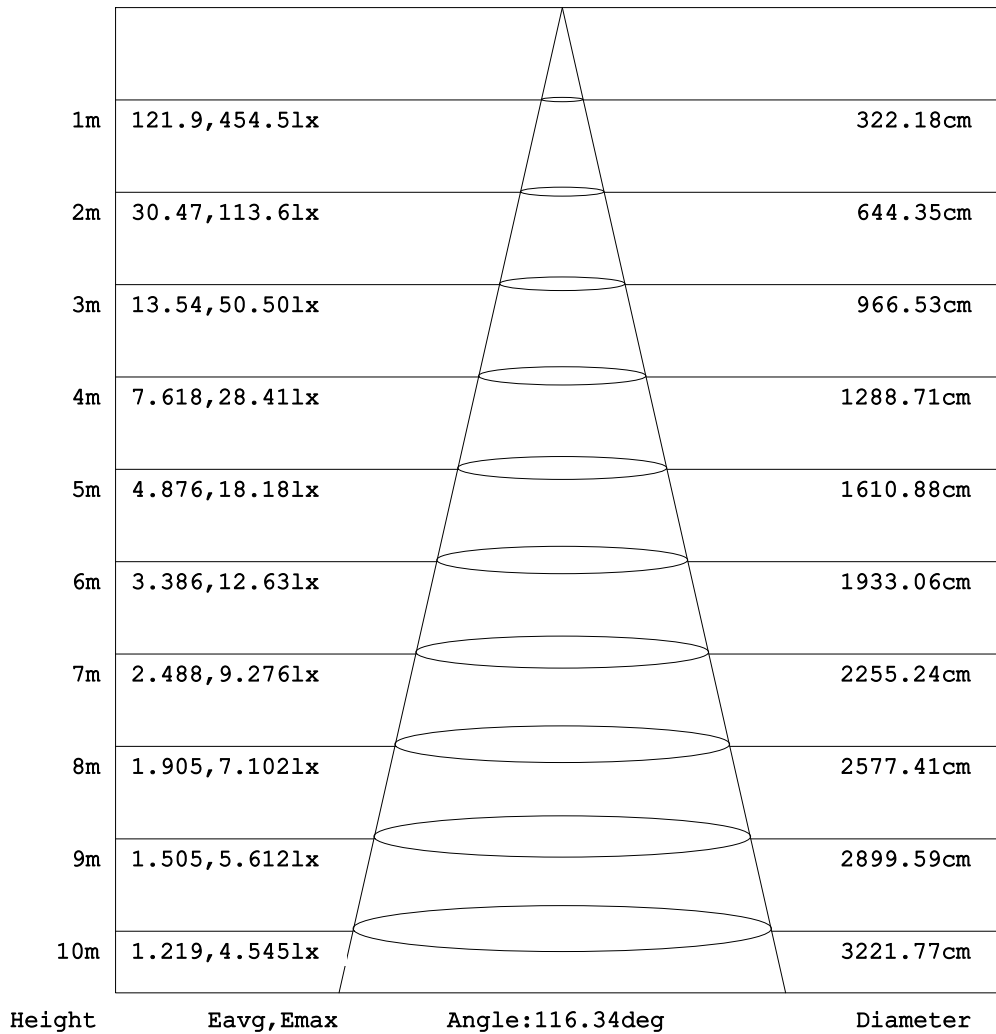


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2024-08-01

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm		
NAME: LST-RGB	TYPE: LED Sheet	WEIGHT:
SPEC.: 60W	DIM.: 480*240 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.24*0.48	Shielding Angle: 120

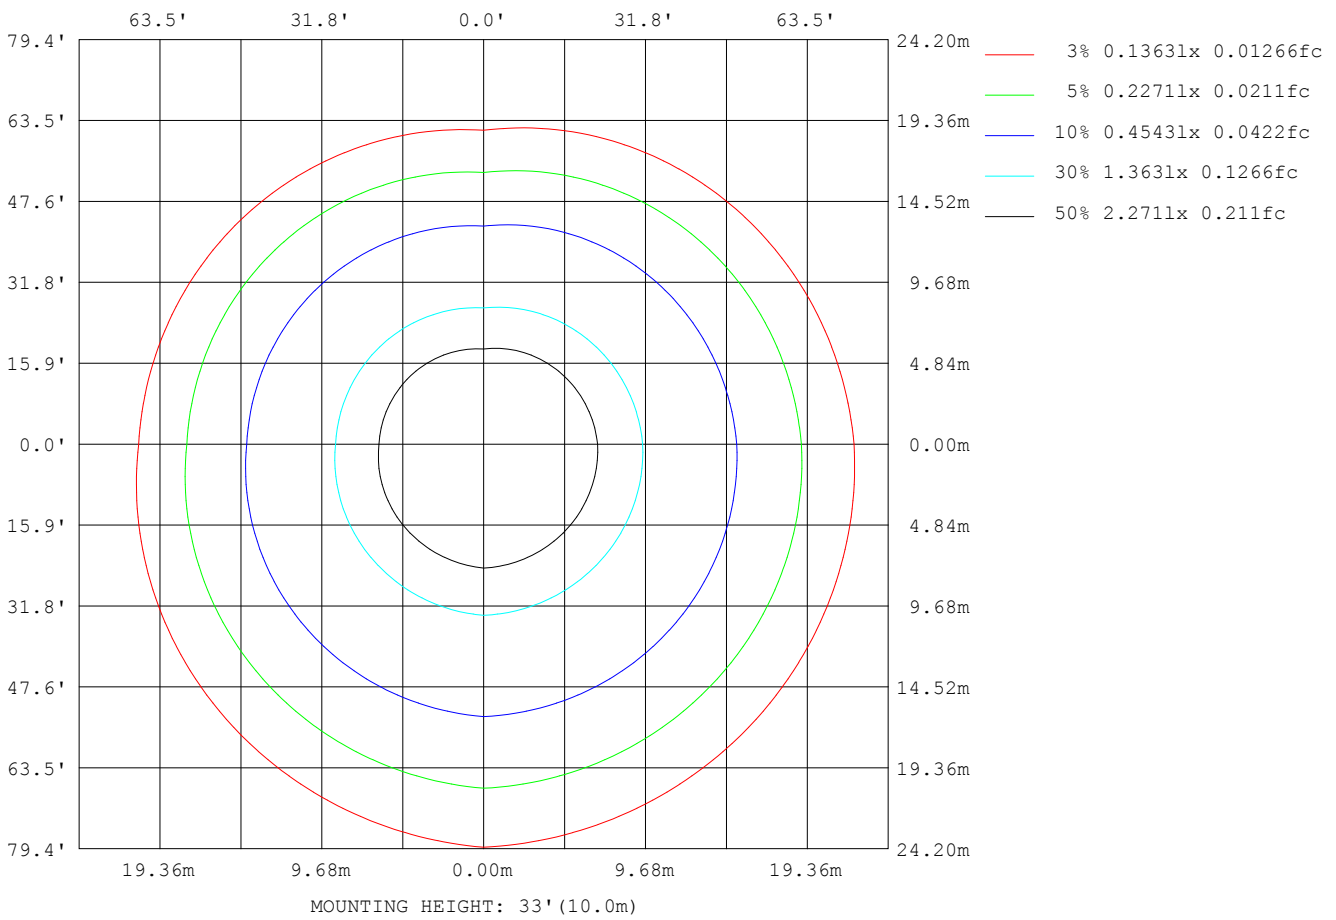

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-08-01

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm		
NAME: LST-RGB	TYPE: LED Sheet	WEIGHT:
SPEC.: 60W	DIM.: 480*240 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.24*0.48	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	3685
L_0~180 (75) av	3230
L_0~180 (85) av	2456
L_90~270 (65) av	3827
L_90~270 (75) av	3624
L_90~270 (85) av	4038
L_45 (65) av	3745
L_45 (75) av	3439
L_45 (85) av	3402

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-08-01

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

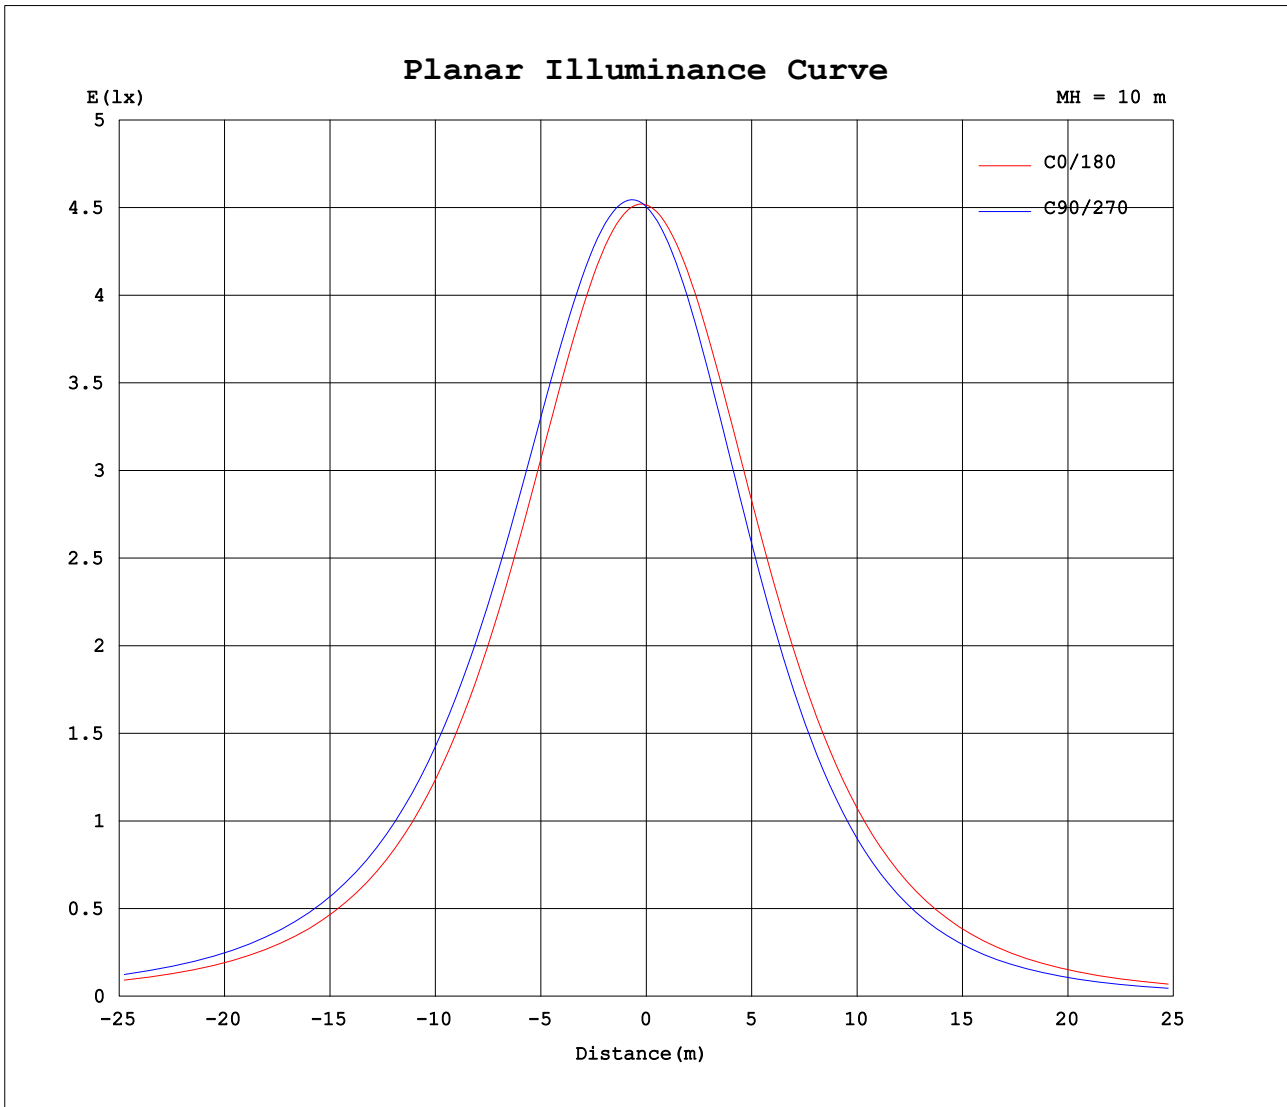

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2024-08-01

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.001V I:0.8354A P:20.050W PF:1.0000 Freq:0Hz Lamp Flux:1416.24x1 lm		
NAME: LST-RGB	TYPE: LED Sheet	WEIGHT:
SPEC.: 60W	DIM.: 480*240 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.24*0.48	Shielding Angle: 120

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	452	451	452	451															
5	454	459	447	439															
10	453	465	440	425															
15	450	468	430	409															
20	443	468	417	390															
25	432	464	401	369															
30	418	456	382	344															
35	399	443	359	317															
40	377	425	333	287															
45	350	403	304	255															
50	318	375	271	220															
55	283	343	235	183															
60	244	305	197	145															
65	202	264	157	108															
70	158	220	117	73.9															
75	114	172	78.7	44.6															
80	70.4	122	43.2	24.1															
85	31.5	71.9	17.8	9.18															
90	6.15	23.5	2.51	0.55															
95	0.54	1.14	0.64	0.58															
100	0.54	0.41	0.69	0.69															
105	0.55	0.47	0.83	0.87															
110	0.64	0.58	1.00	1.00															
115	0.75	0.70	1.15	1.15															
120	0.95	0.81	1.32	1.33															
125	1.05	0.92	1.45	1.40															
130	1.18	1.06	1.59	1.53															
135	1.34	1.21	1.71	1.66															
140	1.42	1.32	1.81	1.73															
145	1.51	1.45	1.92	1.80															
150	1.67	1.55	1.98	1.90															
155	1.73	1.68	2.06	1.93															
160	1.82	1.81	2.11	1.97															
165	1.91	1.91	2.13	2.08															
170	1.96	2.00	2.14	2.12															
175	2.07	2.07	2.14	2.14															
180	2.13	2.12	2.14	2.13															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-08-01

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks: