
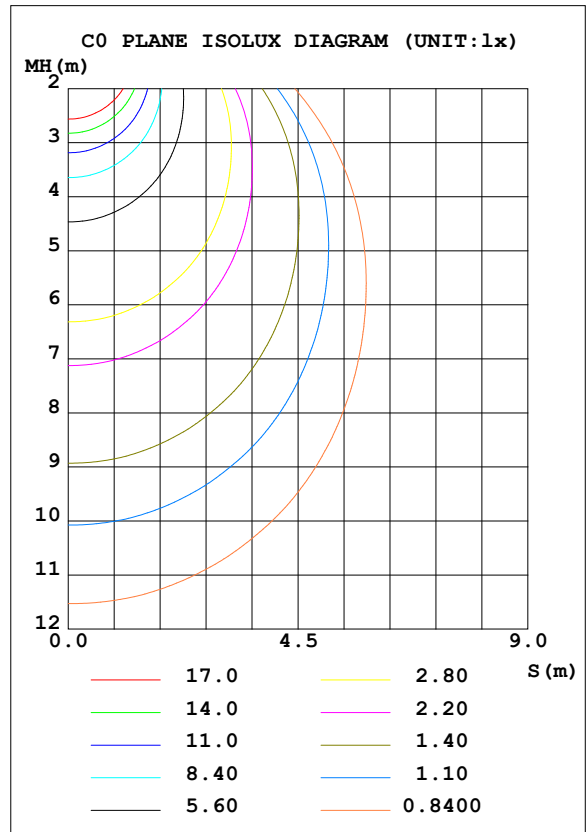


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm		
NAME: RED	TYPE: LED Strip	WEIGHT:
SPEC.: 9.8W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

DATA OF LAMP		PHOTOMETRIC DATA Eff: 35.24 lm/W			
MODEL		I <sub>max</sub> (cd)	111.6	S/MH (C0/180)	1.28
NOMINAL POWER (W)		LOR (%)	100.0	S/MH (C90/270)	1.31
RATED VOLTAGE (V)		TOTAL FLUX (lm)	351.44	η UP, DN (C0-180)	0.3, 50.5
NOMINAL FLUX (lm)	351.356	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.3, 48.9
LAMPS INSIDE	1	η up (%)	0.6	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)		η down (%)	99.4	CIBSE SHR MAX	1.50

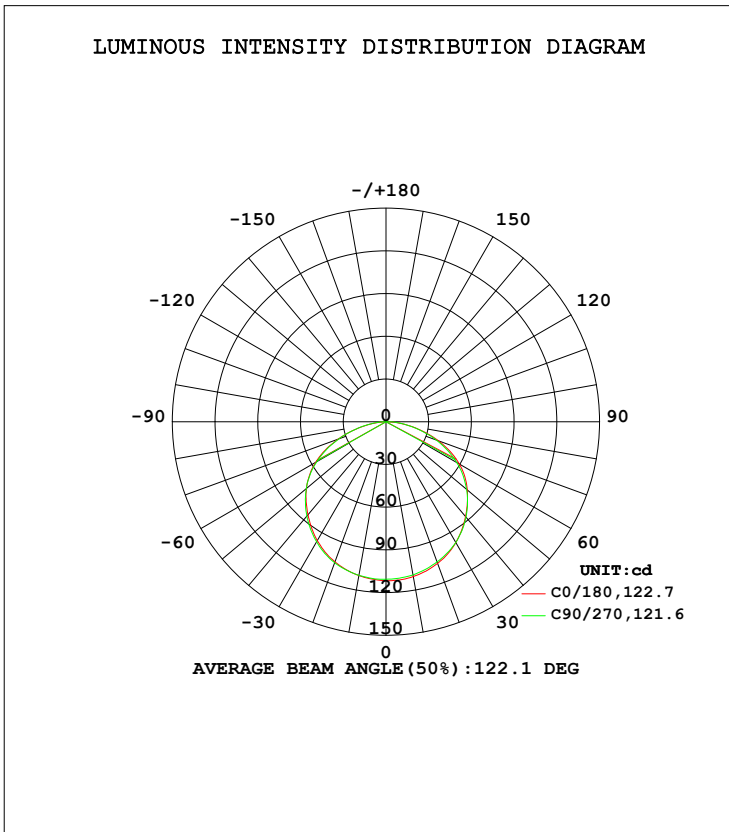

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2024-01-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C90	C180	C270				$\gamma$	$\Phi$ zone	$\Phi$ total	%lum, lamp
10	110.4	109.2	109.7	109.5				0- 10	10.54	10.54	3,3
20	105.9	104.8	104.8	105.4				10- 20	30.46	41.00	11.7,11.7
30	98.01	97.99	96.43	97.43				20- 30	46.94	87.93	25,25
40	86.93	87.41	85.30	86.42				30- 40	57.78	145.7	41.5,41.5
50	74.55	73.88	72.94	73.16				40- 50	61.99	207.7	59.1,59.1
60	59.53	57.48	57.05	56.09				50- 60	59.06	266.8	75.9,75.9
70	39.30	37.57	35.65	35.25				60- 70	47.06	313.8	89.3,89.3
80	17.13	16.88	13.48	14.35				70- 80	27.41	341.2	97.1,97.1
90	1.242	2.691	0.7267	1.816				80- 90	8.006	349.2	99.4,99.4
100	0.1491	0.2296	0.1961	0.2063				90-100	0.5350	349.8	99.5,99.5
110	0.1725	0.2462	0.2636	0.2089				100-110	0.2147	350.0	99.6,99.6
120	0.2094	0.2861	0.3133	0.2218				110-120	0.2331	350.2	99.7,99.7
130	0.3236	0.3627	0.3784	0.2934				120-130	0.2645	350.5	99.7,99.8
140	0.3508	0.4261	0.4679	0.3724				130-140	0.2866	350.8	99.8,99.8
150	0.3906	0.4827	0.5009	0.3893				140-150	0.2633	351.0	99.9,99.9
160	0.4345	0.5296	0.5299	0.4273				150-160	0.2133	351.2	99.9,100
170	0.4904	0.5523	0.5499	0.5048				160-170	0.1415	351.4	100,100
180	0.5419	0.5665	0.5542	0.5542				170-180	0.0510	351.4	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm		
NAME: RED	TYPE: LED Strip	WEIGHT:
SPEC.: 9.8W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

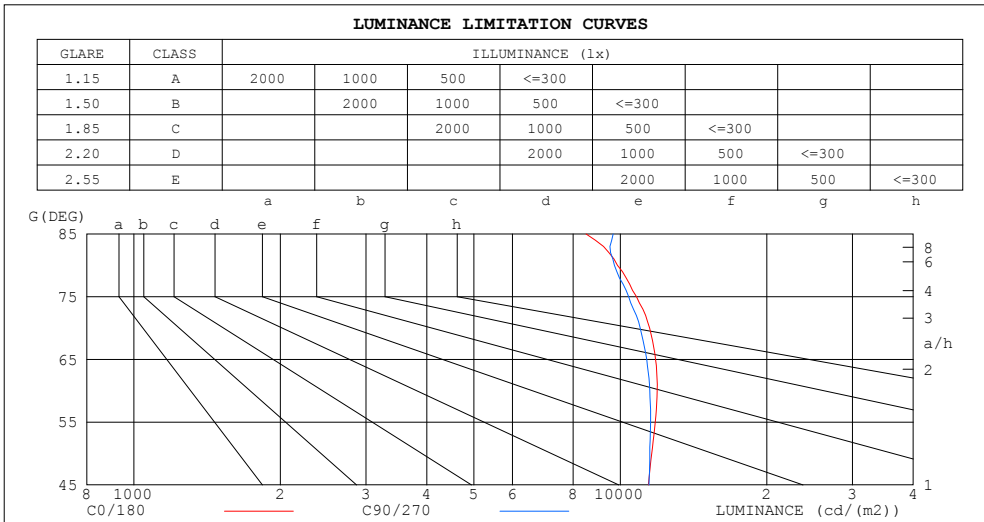

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	8505	9663
80	9865	9722
75	10793	10401
70	11490	10985
65	11817	11330
60	11906	11495
55	11798	11537
50	11599	11494
45	11421	11458


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm		
NAME: RED	TYPE: LED Strip	WEIGHT:
SPEC.: 9.8W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.03	.99	.95	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.89	.86	.84	.82
2.0	.89	.82	.76	.87	.81	.75	.84	.78	.73	.80	.76	.72	.77	.73	.70	.68
3.0	.78	.69	.63	.76	.68	.62	.73	.66	.61	.70	.65	.60	.68	.63	.59	.56
4.0	.69	.60	.53	.67	.59	.52	.65	.57	.52	.62	.56	.51	.60	.55	.50	.48
5.0	.61	.52	.45	.60	.51	.45	.58	.50	.44	.56	.49	.44	.54	.48	.43	.41
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.39	.50	.43	.38	.49	.42	.38	.36
7.0	.50	.41	.34	.49	.40	.34	.47	.40	.34	.46	.39	.34	.44	.38	.33	.31
8.0	.45	.37	.31	.44	.36	.30	.43	.36	.30	.42	.35	.30	.41	.34	.30	.28
9.0	.41	.33	.27	.41	.33	.27	.40	.32	.27	.38	.32	.27	.37	.31	.27	.25
10.0	.38	.30	.25	.38	.30	.25	.37	.29	.25	.36	.29	.24	.35	.29	.24	.22

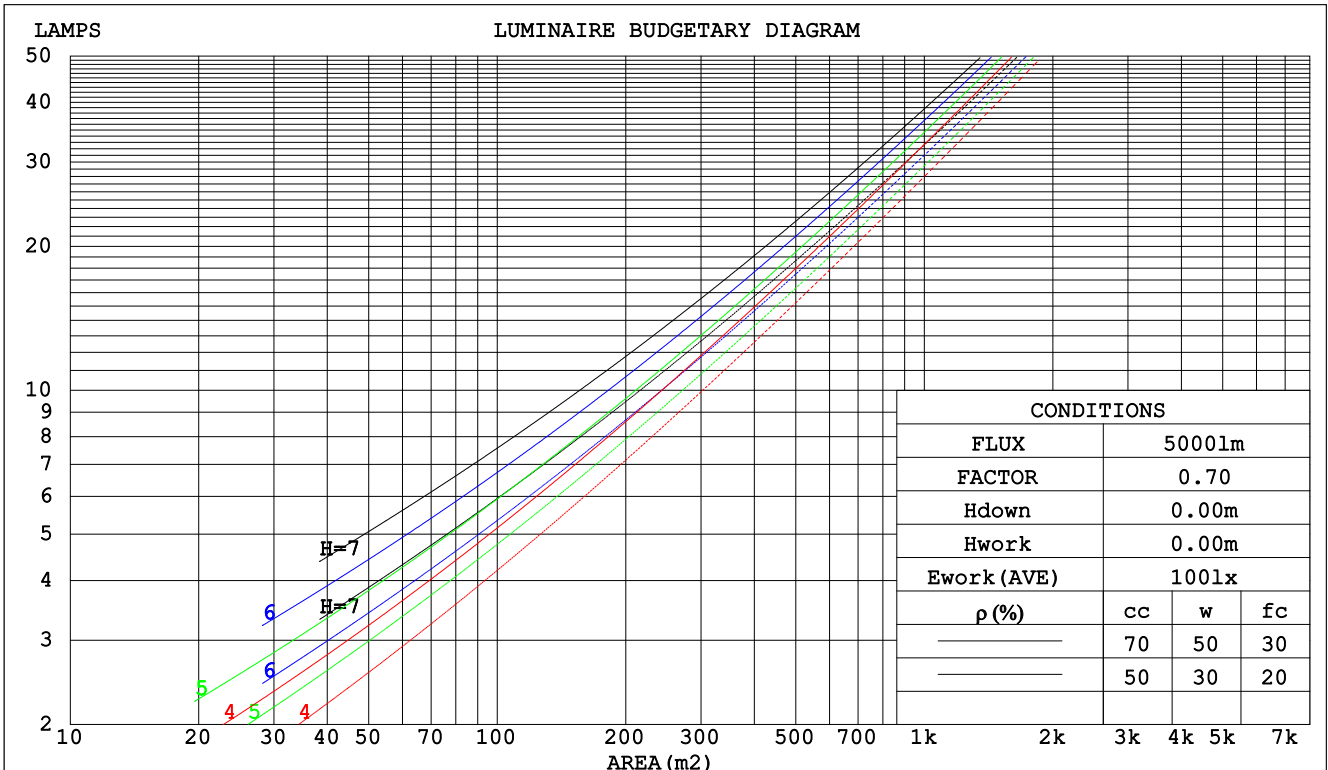

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm									
NAME: RED				TYPE: LED Strip				WEIGHT:	
SPEC.: 9.8W				DIM.: 1000*10*2 (MM)				SERIAL No.: 001	
MFR.: Flexfire LEDs, Inc.				SUR.: 0.01*1				Shielding Angle: 120	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.323	.183	.058	.315	.180	.057	.302	.173	.055	.289	.167	.053	.277	.161	.052	
2.0	.302	.165	.051	.295	.163	.050	.283	.158	.049	.272	.153	.048	.262	.148	.047	
3.0	.278	.148	.044	.272	.146	.044	.262	.142	.043	.252	.138	.042	.242	.134	.042	
4.0	.256	.133	.039	.251	.131	.039	.241	.128	.038	.232	.125	.038	.224	.122	.037	
5.0	.236	.120	.035	.231	.119	.035	.223	.116	.034	.215	.113	.034	.208	.111	.033	
6.0	.218	.109	.031	.214	.108	.031	.207	.106	.031	.200	.104	.030	.193	.102	.030	
7.0	.203	.100	.028	.199	.099	.028	.192	.097	.028	.186	.095	.028	.180	.094	.027	
8.0	.189	.092	.026	.186	.091	.026	.180	.090	.026	.174	.088	.025	.169	.087	.025	
9.0	.177	.086	.024	.174	.085	.024	.168	.083	.024	.163	.082	.023	.158	.080	.023	
10.0	.166	.080	.022	.163	.079	.022	.158	.078	.022	.154	.076	.022	.149	.075	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.195	.195	.195	.167	.167	.167	.114	.114	.114	.065	.065	.065	.021	.021	.021	
1.0	.186	.161	.138	.159	.138	.119	.109	.095	.082	.063	.055	.048	.020	.018	.015	
2.0	.178	.137	.102	.153	.118	.088	.105	.081	.061	.060	.047	.036	.019	.015	.012	
3.0	.171	.119	.078	.147	.103	.068	.101	.071	.047	.058	.042	.028	.019	.014	.009	
4.0	.163	.106	.062	.140	.092	.054	.096	.064	.038	.056	.037	.023	.018	.012	.007	
5.0	.156	.096	.051	.134	.083	.045	.092	.058	.032	.053	.034	.019	.017	.011	.006	
6.0	.149	.087	.043	.128	.076	.038	.088	.053	.027	.051	.031	.016	.017	.010	.005	
7.0	.142	.081	.038	.122	.070	.033	.084	.049	.023	.049	.029	.014	.016	.009	.005	
8.0	.135	.075	.033	.116	.065	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
9.0	.129	.070	.030	.111	.061	.026	.077	.043	.018	.045	.025	.011	.015	.008	.004	
10.0	.123	.066	.027	.106	.057	.024	.074	.040	.017	.043	.024	.010	.014	.008	.003	

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm										
NAME: RED					TYPE: LED Strip			WEIGHT:		
SPEC.: 9.8W					DIM.: 1000*10*2 (MM)			SERIAL No.: 001		
MFR.: Flexfire LEDs, Inc.					SUR.: 0.01*1			Shielding Angle: 120		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.3	26.8	25.5	27.0	27.3	25.2	26.7	25.4	26.9	27.2
3H	27.0	28.5	27.3	28.7	29.0	26.9	28.3	27.2	28.5	28.8
4H	27.7	29.1	28.0	29.3	29.6	27.5	28.9	27.9	29.2	29.4
6H	28.2	29.5	28.6	29.8	30.1	28.0	29.3	28.4	29.6	29.9
8H	28.4	29.6	28.7	29.9	30.2	28.2	29.5	28.6	29.8	30.1
12H	28.5	29.7	28.8	30.0	30.3	28.4	29.6	28.7	29.9	30.2
4H 2H	25.9	27.3	26.3	27.6	27.8	25.9	27.2	26.2	27.5	27.8
3H	27.9	29.1	28.2	29.4	29.7	27.7	28.9	28.1	29.2	29.6
4H	28.7	29.8	29.1	30.1	30.5	28.5	29.6	28.9	30.0	30.3
6H	29.3	30.3	29.7	30.7	31.0	29.2	30.1	29.6	30.5	30.9
8H	29.5	30.5	30.0	30.8	31.2	29.4	30.3	29.8	30.7	31.1
12H	29.7	30.5	30.1	30.9	31.3	29.6	30.4	30.0	30.8	31.3
8H 4H	29.0	29.9	29.4	30.3	30.7	28.8	29.8	29.3	30.1	30.5
6H	29.8	30.5	30.2	30.9	31.4	29.6	30.4	30.1	30.8	31.3
8H	30.1	30.8	30.6	31.2	31.7	30.0	30.7	30.5	31.1	31.6
12H	30.3	30.9	30.8	31.4	31.9	30.3	30.8	30.8	31.3	31.8
12H 4H	29.0	29.8	29.4	30.2	30.6	28.9	29.7	29.3	30.1	30.5
6H	29.8	30.5	30.3	30.9	31.4	29.7	30.4	30.2	30.8	31.3
8H	30.2	30.8	30.7	31.2	31.7	30.1	30.7	30.6	31.1	31.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 351.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.6)  
 Area: 0.01 m2

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm		
NAME: RED	TYPE: LED Strip	WEIGHT:
SPEC.: 9.8W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	56	44	37	55	44	37	54	43	36	30
0.80	66	54	46	65	53	46	63	52	46	38
1.00	74	63	55	73	62	55	71	64	54	47
1.25	81	71	63	80	70	63	77	68	62	54
1.50	87	76	69	85	75	68	82	73	67	59
2.00	94	85	78	92	83	77	88	81	76	67
2.50	98	90	83	96	88	82	92	85	80	72
3.00	101	94	88	99	92	87	95	89	85	76
4.00	105	99	95	103	98	93	99	94	90	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm		
NAME: RED	TYPE: LED Strip	WEIGHT:
SPEC.: 9.8W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

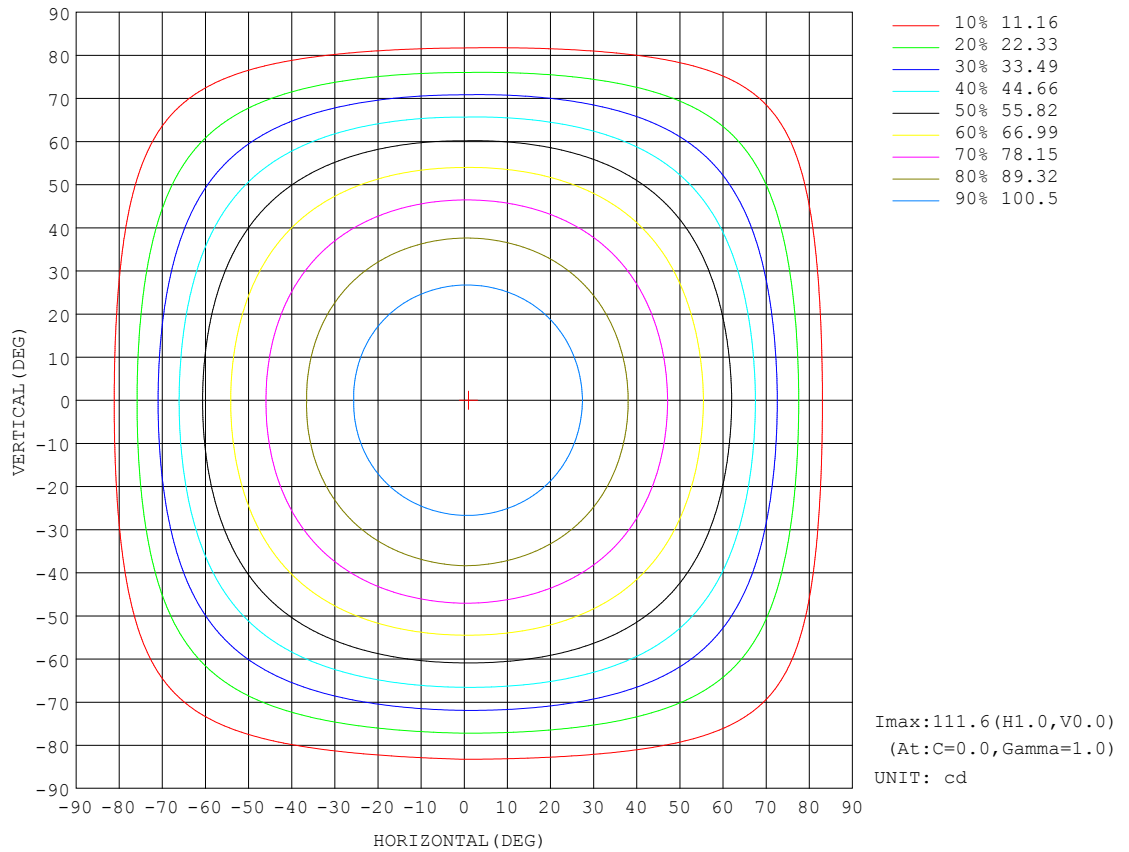


C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:



**AAI Figure**

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm		
NAME: RED	TYPE: LED Strip	WEIGHT:
SPEC.: 9.8W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

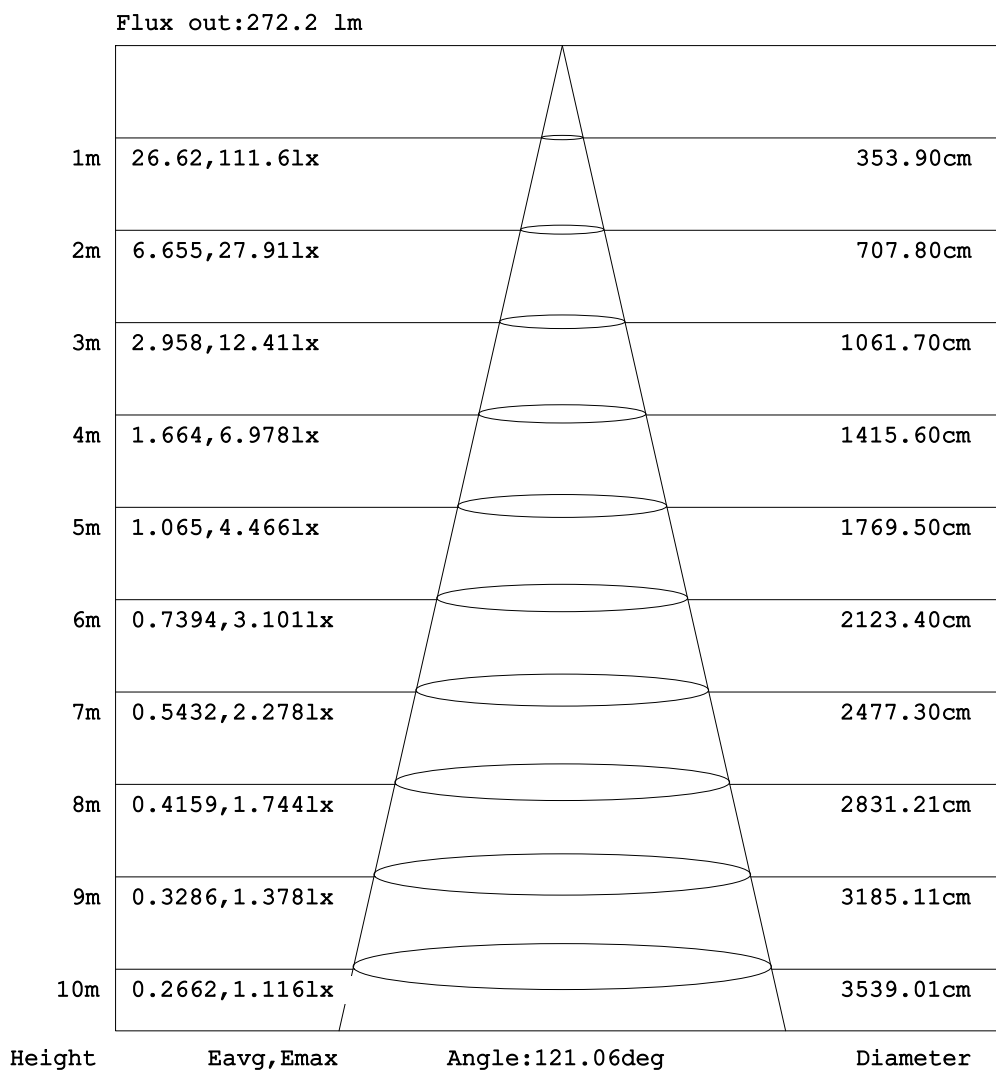


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

ISOLUX DIAGRAM

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm		
NAME: RED	TYPE: LED Strip	WEIGHT:
SPEC.: 9.8W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

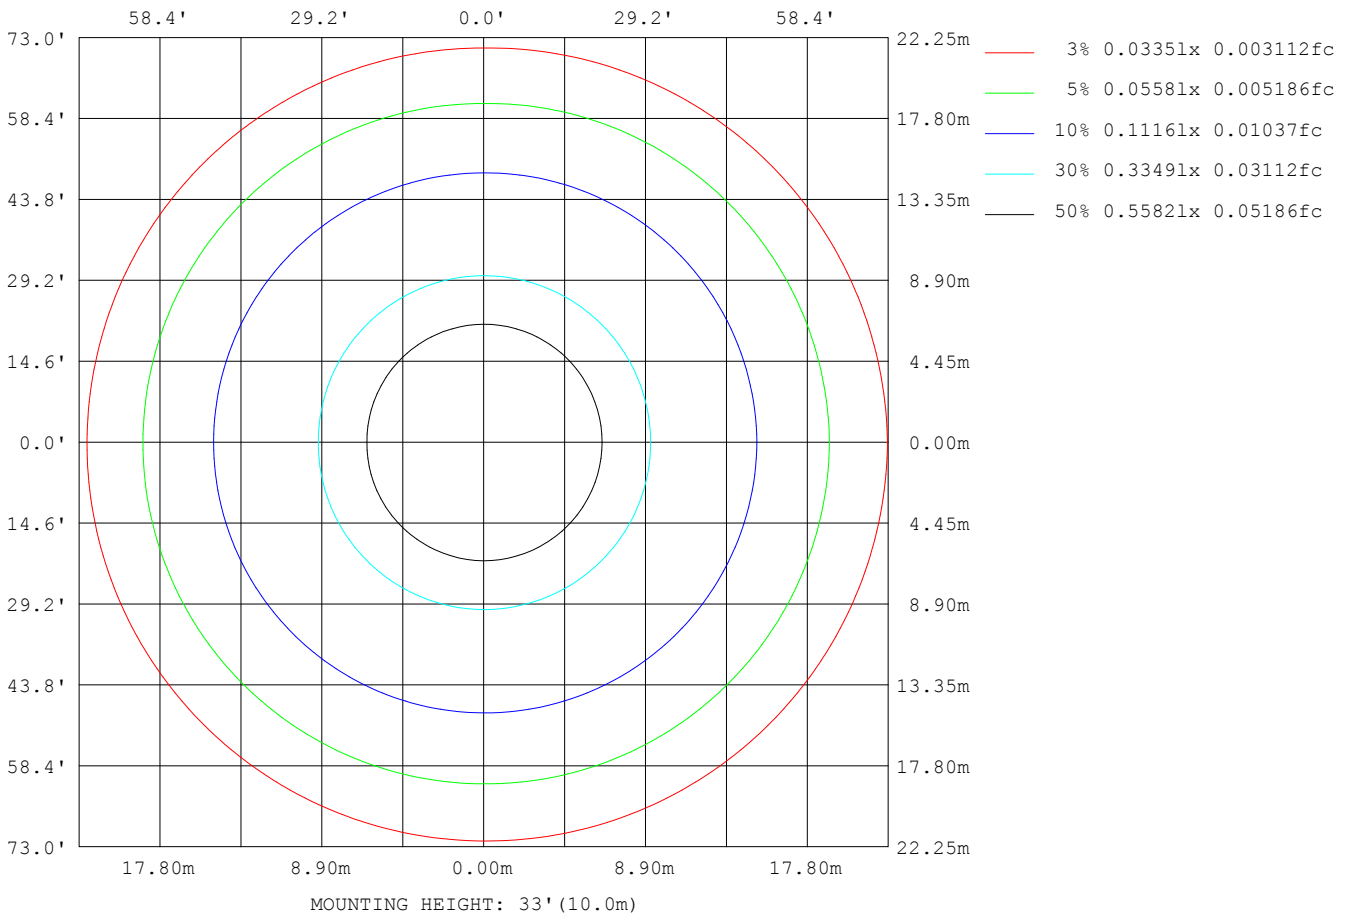

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm		
NAME: RED	TYPE: LED Strip	WEIGHT:
SPEC.: 9.8W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120


AvgL	cd/m2
L_0~180 (65) av	11478
L_0~180 (75) av	10075
L_0~180 (85) av	6959
L_90~270 (65) av	11107
L_90~270 (75) av	9915
L_90~270 (85) av	8371
L_45 (65) av	11225
L_45 (75) av	9930
L_45 (85) av	7745

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks:

Planar Illuminance Curve

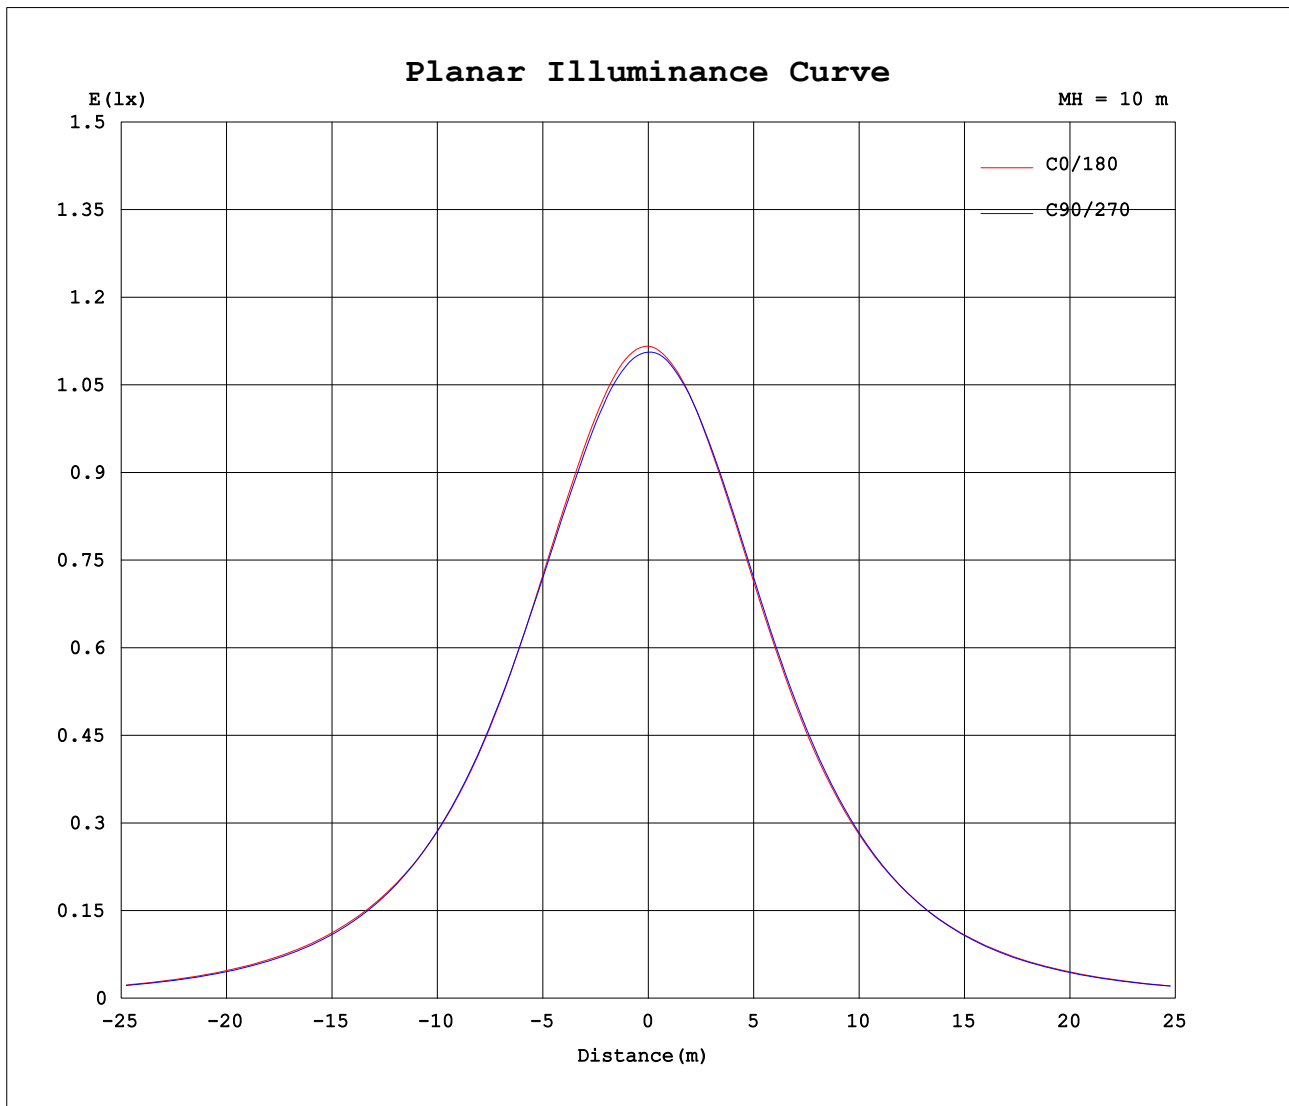

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Test Date: 2024-01-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity: 65.0%  
 Test Distance: 8.700m [K=1.0000]  
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.003V I:0.4155A P:9.9733W PF:1.0000 Freq:0Hz Lamp Flux:351.356x1 lm		
NAME: RED	TYPE: LED Strip	WEIGHT:
SPEC.: 9.8W	DIM.: 1000*10*2 (MM)	SERIAL No.: 001
MFR.: Flexfire LEDs, Inc.	SUR.: 0.01*1	Shielding Angle: 120

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	90	180	270															
0	112	111	112	111															
5	111	110	111	110															
10	110	109	110	110															
15	109	107	108	108															
20	106	105	105	105															
25	103	102	101	102															
30	98.0	98.0	96.4	97.4															
35	92.7	93.1	91.1	92.3															
40	86.9	87.4	85.3	86.4															
45	80.8	81.0	79.3	80.1															
50	74.6	73.9	72.9	73.2															
55	67.7	66.2	65.7	65.3															
60	59.5	57.5	57.1	56.1															
65	49.9	47.9	47.1	46.0															
70	39.3	37.6	35.7	35.3															
75	27.9	26.9	24.2	24.4															
80	17.1	16.9	13.5	14.4															
85	7.41	8.42	4.72	6.17															
90	1.24	2.69	0.73	1.82															
95	0.15	0.42	0.25	0.46															
100	0.15	0.23	0.20	0.21															
105	0.16	0.21	0.23	0.20															
110	0.17	0.25	0.26	0.21															
115	0.17	0.25	0.28	0.21															
120	0.21	0.29	0.31	0.22															
125	0.25	0.33	0.34	0.23															
130	0.32	0.36	0.38	0.29															
135	0.34	0.39	0.41	0.34															
140	0.35	0.43	0.47	0.37															
145	0.37	0.46	0.47	0.38															
150	0.39	0.48	0.50	0.39															
155	0.41	0.51	0.53	0.41															
160	0.43	0.53	0.53	0.43															
165	0.48	0.54	0.55	0.45															
170	0.49	0.55	0.55	0.50															
175	0.52	0.55	0.55	0.54															
180	0.54	0.57	0.55	0.55															

C Range: 0 - 360DEG  
 C Interval: 90.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Test Date:2024-01-26

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-2000B\_V1 SYSTEM V2.00.444  
 Humidity:65.0%  
 Test Distance:8.700m [K=1.0000]  
 Remarks: