
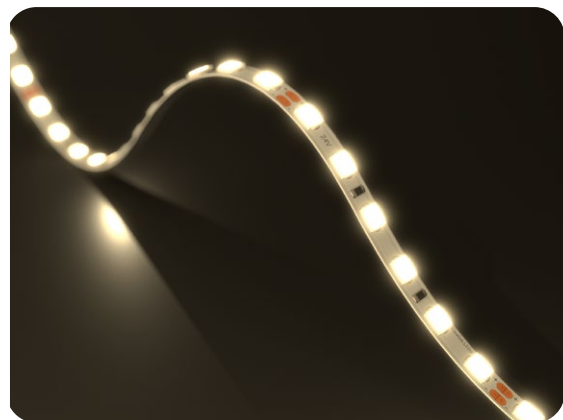


UltraBright™ Slim Series LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

Our UltraBright™ Slim Series offers full-range dimming and convenient extra-thin design, all while keeping colors in your spaces true to life. Available in warm or cool white, it packs most LED strip benefits—high brightness, steady temperatures, and strong adhesive backing—in a slimmer build. Architects and lighting designers trust it for sleek, hidden installs and tight nooks in homes or businesses.

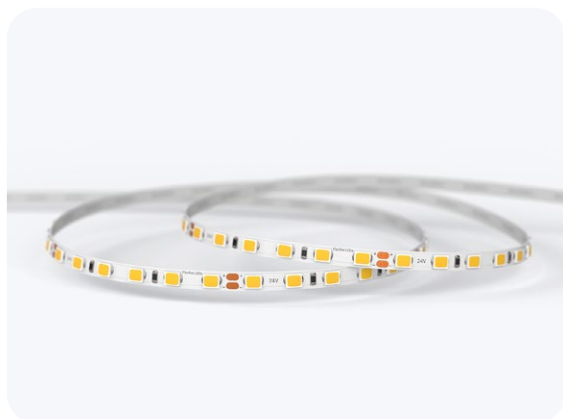

7 Year
Warranty



Product Features

Voltage	24V DC
Wattage	4.6 W/ft (15.1 W/m)
Brightness	Up to 391 lm/ft (1,285 lm/m)
Efficacy	Up to 90 lm/W
CRI	High CRI of up to 95
R9 and R13 Values	Great R9 (up to 82) & R13 (97)
Number of LEDs	36 LEDs/ft (120/m)
Beam Angle	120°
LED Pitch	1/4" (7 mm)
Strip Width	3/16" (4 mm)
Cutting Points	2" (50 mm)
Max Run Length in Series	16 ft (5 m)
PCB	4 oz Copper
LED Size	2835
Adhesive Type	3M 300 LSE
Ambient Temperature	-4°F to 113°F (-20°C to 45°C)
Operating Temperature	-4°F to 149°F (-20°C to 65°C)
Dimmable	Yes
IP Rating	IP20: Indoor, Dry Location

Title 24 is regulated for lamps with color temperatures 4000K and below.

Ordering Code

Brand

-

Series

-

CCT

-

Voltage

-

Length

UB

SS

24V


16FT

UltraBright™

Slim Series

30K90C: 3000K/CRI 90+
50K90C: 5000K/CRI 90+

Dimensions

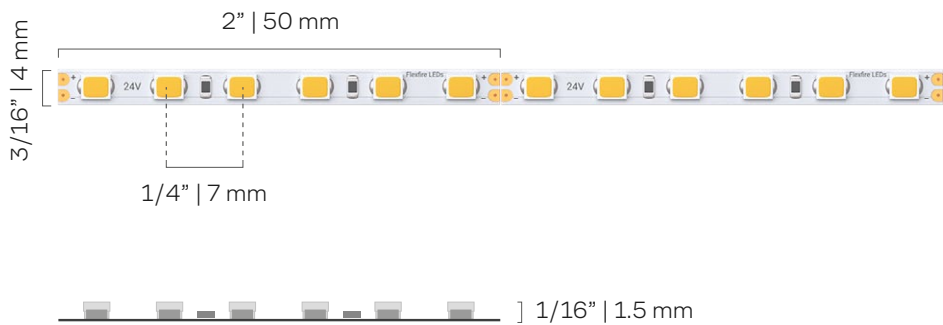

Product Specifications

Product SKU	Color* (CCT)	Watts/Foot (Meter)	Lumens/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
UB-SS-30K90C	3000K	4.6 W/ft (15.1 W/m)	360 lm/ft (1,180 lm/m)	81 lm/W	94	100	92
UB-SS-50K90C	5000K	4.6 W/ft (15.1 W/m)	391 lm/ft (1,285 lm/m)	90 lm/W	95	99	91

*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.