


Outdoor Vital™ 100 LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

The Outdoor Vital™ 100 LED Strip Light is a straightforward and affordable solution designed to meet extra-low-profile lighting needs in your wet location. Its easy-to-clean silicone cover protects it against dust and low-pressure water jets. Available in warm and cool white, its subtle brightness is ideal for bathrooms, kitchens, patios, and decks that call for simple yet effective hints of light.

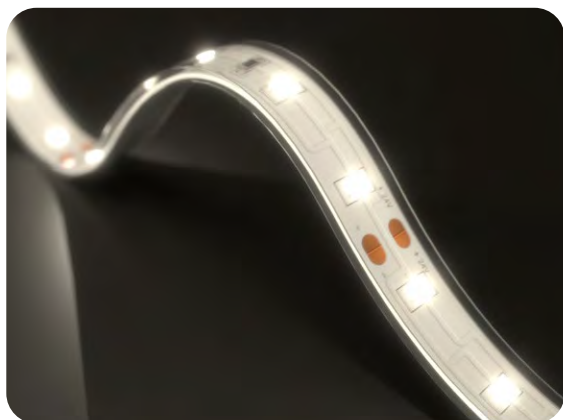

Product Features

Voltage	24V DC
Wattage	1.2 W/ft (3.9 W/m)
Brightness	Up to 100 lm/ft (327 lm/m)
Efficacy	Up to 82 lm/W
CRI	High CRI up to 95
Number of LEDs	18 LEDs/ft (60 LEDs/m)
Beam Angle	120°
LED Pitch	5/8" (16 mm)
Strip Width	1/2" (12 mm)
Cutting Points	4" (100 mm)
Max Run Length in Series	46 ft (14 m)
PCB	2 oz Copper
LED Size	3528
Adhesive Type	3M LSE 9495
Ambient Temperature	-4°F to 104°F (-20°C to 40°C)
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Dimmable	Yes
IP Rating	IP65: Outdoor, Wet Location

7 Year
Warranty



Ordering Code

IP Protection

-

Series

-

Color Temp.

-

Voltage

-

Length

IP65

VL10

24V

16FT

Vital™

30K: 3000K
50K: 5000K

Example: IP65-VL10-30K-24V-16FT

Dimensions



Included Accessories:

Weatherproof
C1 Connector (Female)

36 mm
12 mm
8 mm

x1

Weatherproof
C1 Connector (Male)

36 mm
17 mm
9 mm

x1

Mounting
Bracket

W: 6 mm L: 28 mm

x10

End Cap

W: 14 mm L: 6 mm

x2

End Cap
with holes

W: 14 mm L: 6 mm

x2

Product Specifications

Product SKU	Color* (CCT)	Watts/Foot (Meter)	Lumens/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
IP65-VL10-30K	3000K	1.2 W/ft (3.9 W/m)	100 lm/ft (327 lm/m)	82	93	99	90
IP65-VL10-50K	5000K	1.2 W/ft (3.9 W/m)	95 lm/ft (313 lm/m)	80	95	99	89