


Vital™ 300 LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

The Vital™ 300 LED Strip Light is a straightforward and affordable solution designed to meet your space's basic accent lighting needs without cutting corners. Available in warm and cool white, its moderate brightness is ideal for homes and businesses that call for simple yet effective decoration and performance—whether for under-cabinet lighting, backlighting, highlighting architectural details and displays, and more.

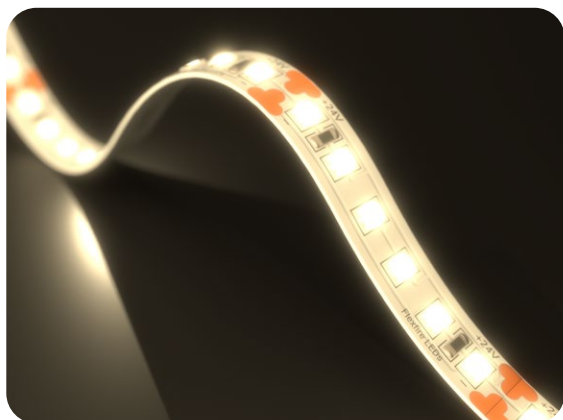

Product Features

Voltage	24V DC
Wattage	3.5 W/ft (11.4 W/m)
Brightness	Up to 303 lm/ft (994 lm/m)
Efficacy	Up to 87 lm/W
CRI	High CRI up to 95
Number of LEDs	36 LEDs/ft (120 LEDs/m)
Beam Angle	120°
LED Pitch	1/4" (7 mm)
Strip Width	3/8" (10 mm)
Cutting Points	2" (50 mm)
Max Run Length in Series	23 ft (7 m)
PCB	2 oz Copper
LED Size	3528
Adhesive Type	3M VHB 4930
Ambient Temperature	-4°F to 104°F (-20°C to 40°C)
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Dimmable	Yes
IP Rating	IP20: Indoor, Dry Location

7 Year
Warranty



Ordering Code

Series

-

Color Temp.

-

Voltage

-

Length

VL 30

Vital™

30K: 3000K
50K: 5000K

24V

16FT
100FT

Example: VL30-30K-24V-16FT

Dimensions



Product Specifications

Product SKU	Color* (CCT)	Watts/Foot (Meter)	Lumens/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
VL30-30K	3000K	3.5 W/ft (11.4 W/m)	302 lm/ft (990 lm/m)	86	93	99	90
VL30-50K	5000K	3.5 W/ft (11.4 W/m)	303 lm/ft (994 lm/m)	87	95	98	88