
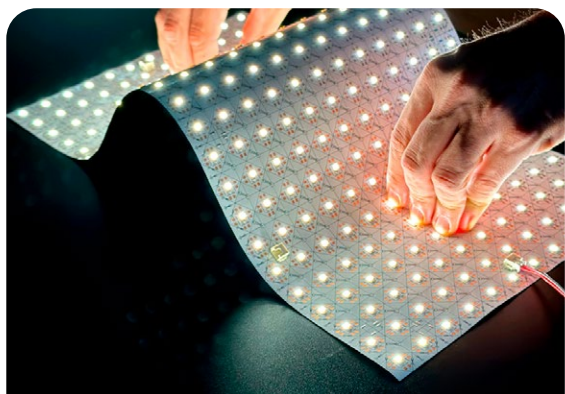


White LED Light Sheet

 **PRECAUTION:** Please read all instructions carefully before installation.

Our White LED Light Sheets are thin, bendable surfaces with built-in, medium-brightness LEDs that keep colors in your space true to life. Available in warm and cool white, each sheet offers cut-to-measure versatility for consistent, right-angled shapes and designs—perfect for elegant backlit stone, countertops, and signs. Up to 6 can link together seamlessly for larger home and business projects.

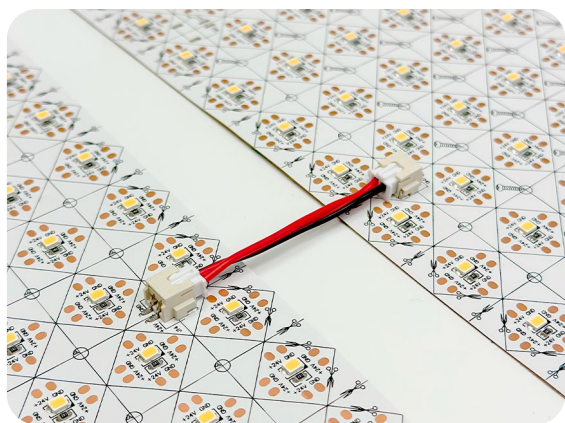

Product Features

Voltage	24V DC
Wattage	29W
Brightness	Up to 3064 lm
Efficacy	Up to 103 lm/W
CRI	Up to 94
Number of LEDs	288 LEDs/Sheet
Beam Angle	120°
Cutting Points	13/16" (20 mm)
Max Run Length in Series*	Up to 6 Sheets
PCB	2 oz Copper
LED Size	2835
Adhesive Type	3M 300 LSE
Ambient Temperature	-4°F to 113°F (-20°C to 45°C)
Operating Temperature	-4°F to 149°F (-20°C to 65°C)
Dimmable	Yes
IP Rating	IP20: Indoor, Dry Location

5-Year
Warranty



*To be in compliance with Class 2 and our UL Listing, the maximum run length of the light sheets may not exceed 3 light sheets. However, in terms of sheer voltage drop and reduction in brightness, the light sheets are able to be run up to 6 continuous sheets, which would be outside the parameters of our UL certification.

Ordering Code

Series

-

CCT

-

Voltage


LST

24V

Light Sheets

30K: 3000K
65K: 6500K

Dimensions

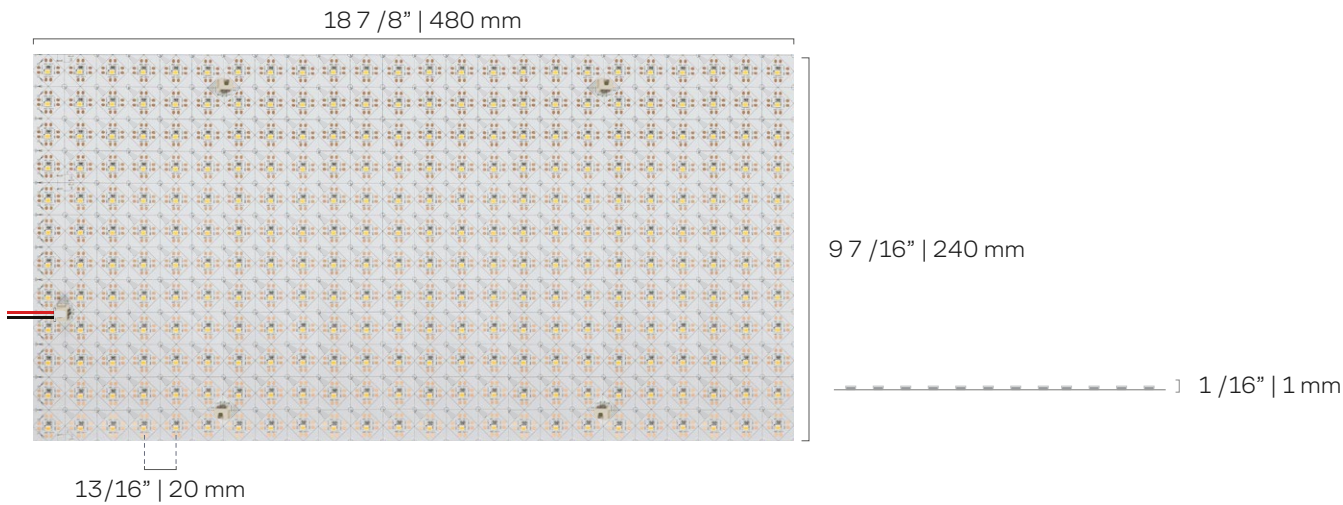

Product Specifications

Product SKU	Color* (CCT)	Watts	Lumens	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
LST-30K	3000K	29 W	2940 lm	98 lm/W	93	99	90
LST-50K	5000K	29 W	3064 lm	103 lm/W	94	98	88

*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.

Complete Your Setup



✓ Drivers



✓ Controllers & Dimmers



✓ Connectors