


Lucid™

White Neon Side Bend LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

Our Lucid™ White Neon Side Bend Series combines the look of classic neon with easy-to-clean silicone protection from dust and low-pressure water jets. Available in warm or cool white, this flexible, continuous line of light improves on traditional neon drawbacks, delivering an ideal sleek, seamless glow for hospitality accents and mood-setting, signs, walls, outdoor landscaping, and spaces with built-in lighting.

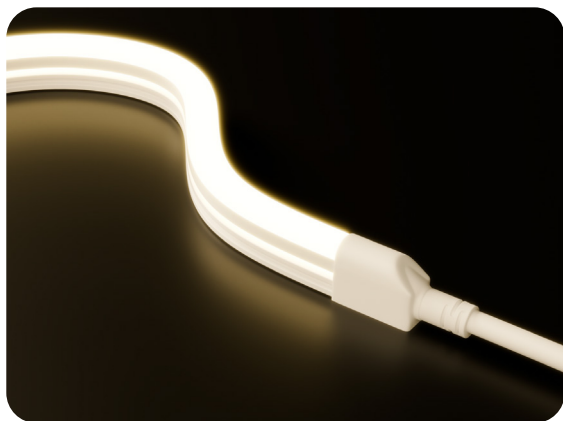

Product Features

Color Temperature	3000K 5000K
Voltage	24V DC
Wattage	2.7 W/ft (9 W/m)
Brightness	Up to 155 lm/ft (510 lm/m)
Efficacy	Up to 56 lm/W
CRI	83
Number of LEDs	36 LEDs/ft (120 LEDs/m)
Beam Angle	160°
Strip Width	~ 3/8" (10 mm at top, 9 mm at base)
Cutting Points	2" (50 mm)
Max Run Length in Series	32 ft (10 m)
LED Size	3014
Ambient Temperature	-4°F to 113°F (-20°C to 45°C)
Operating Temperature	-4°F to 167°F (-20°C to 75°C)
Dimmable	Yes
IP Rating	IP65: Outdoor, Wet Location

7 Year
Warranty



Ordering Code

Series

-

Type

-

CCT

-

Voltage

-

Length

NEON

S

24V

32FT


Neon Series

Side Bend

30K: 3000K
50K: 5000K

Example: NEON-S-RGB-24V-32FT

Dimensions

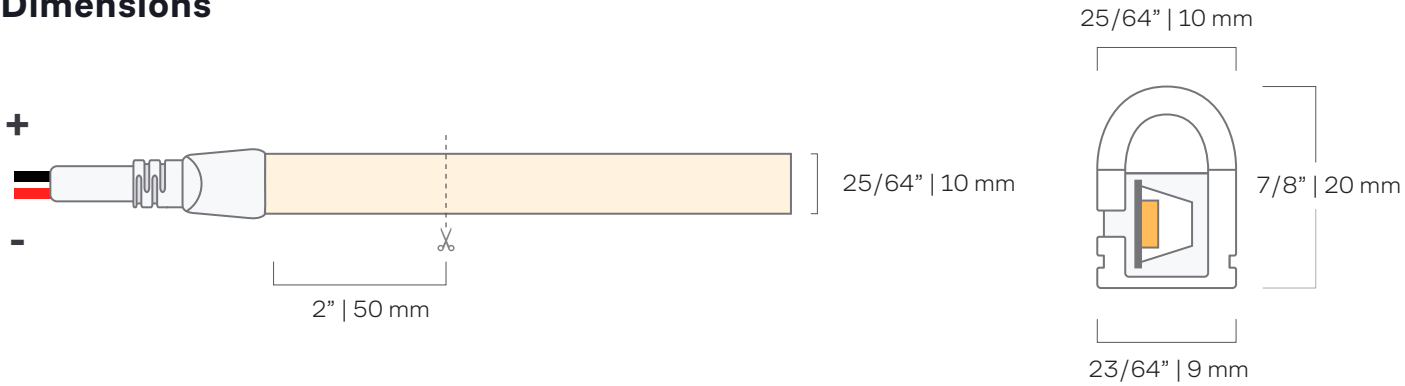

Product Specifications

Product SKU	Color* CCT	Watts/Foot (Meter)	Lumens/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
NEON-S-30K	3000K	2.7 W/ft (9 W/m)	144 lm/ft (473 lm/m)	52	83	94	86
NEON-S-50K	5000K	2.7 W/ft (9 W/m)	155 lm/ft (510 lm/m)	56	83	95	84

*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.