


ClickBright™

Tunable White LED Light Bar

 **PRECAUTION:** Please read all instructions carefully before installation.

Our ClickBright™ Tunable White LED Light Bars deliver unmatched versatility and medium brightness for task or accent lighting projects. They offer smooth switches between whites with an in-app slider or hand-motion sensor presets. With a built-in cover that prevents light spots and a linkable design of up to 16ft, they are the ultimate choice for under cabinets, closets, or shelving.

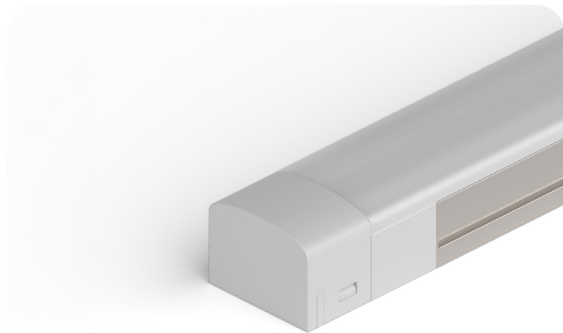

5 Year
Warranty



Product Features

Color Temperature Range	3000K - 5000K
Voltage	24V DC
Wattage	3.5W per 10" fixture 6.5W per 20" fixture
Brightness	Up to 329 lm per 10" fixture Up to 534 lm per 20" fixture
Efficacy	Up to 107 lm/W
CRI	Up to 94
Beam Angle	120°
Light Bar Width	21/32" (16.5 mm)
Max Run Length in Series	16 ft (5 m)
LED Size	2835
Ambient Temperature	32°F to 104°F (0°C to 40°C)
Operating Temperature	32°F to 122°F (0°C to 50°C)
Dimmable	Yes
IP Rating	IP20: Indoor, dry location
Fixture Color	Silver
Installation	Surface mount

Ordering Code

Series

-

CCT

-

Voltage

-

Length

LB

TW3050K

Light Bar

3000K - 5000K

24V


10IN - 10.16" bar
20IN - 19.61" bar

Example: LB-TW3050K-24V-10IN

Dimensions

Top profile:

Side profile:

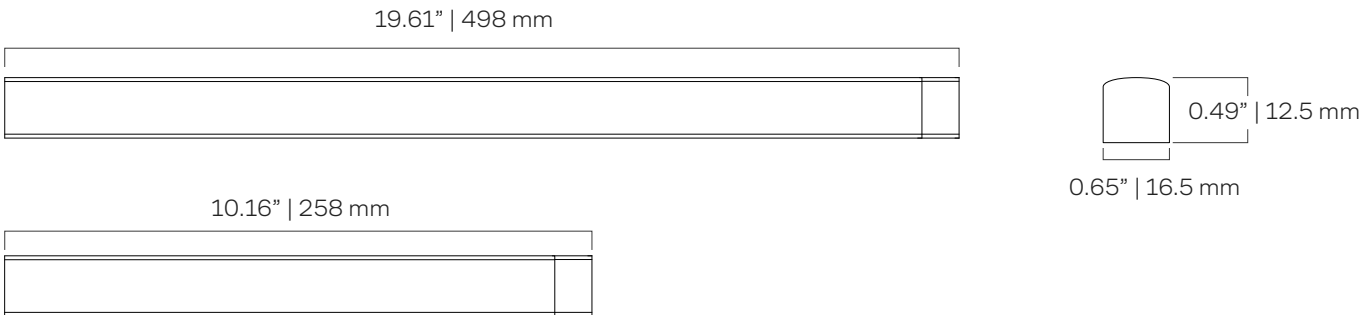

Included Accessories:



X2
Mounting
Brackets



X2
Mounting
Screws

Product Specifications

Product SKU	Length	Color* (CCT)	Watts/Fixture	Lumens/Fixture	Luminous Efficacy (Lumens / Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
LB-TW3050K	10 in	3000K	3.5W	270 lm	86 lm/W	93	99	89
		4000K	3.5W	313 lm	107 lm/W	94	98	87
		5000K	3.5W	329 lm	94 lm/W	91	94	82
	20 in	3000K	6.5W	423 lm	83 lm/W	93	99	89
		4000K	6.5W	487 lm	102 lm/W	94	97	87
		5000K	6.5W	534 lm	91 lm/W	91	94	82

*CCT may be +/-100K but always ordered from same bin and will present no noticeable differences perceived by the human eye.