


Vital™ 100 LED Strip Light

 **PRECAUTION:** Please read all instructions carefully before installation.

The Vital™ 100 LED Strip Light is a straightforward and affordable solution that delivers basic, extra-low-profile lighting without cutting corners. Available in warm and cool white, its subtle brightness is ideal for homes and businesses that call for simple yet effective hints of light. It's ideal for layered cove and accent lighting or spaces that need a gentle mood boost.

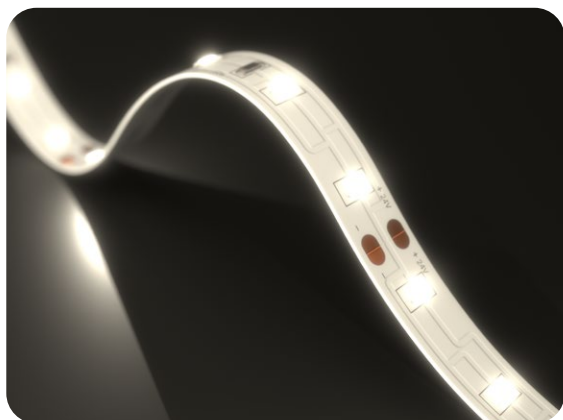

Product Features

Voltage	24V DC
Wattage	1.2 W/ft (3.9 W/m)
Brightness	Up to 100 lm/ft (327 lm/m)
Efficacy	Up to 82 lm/W
CRI	High CRI up to 95
Number of LEDs	18 LEDs/ft (60 LEDs/m)
Beam Angle	120°
LED Pitch	5/8" (16 mm)
Strip Width	3/8" (10 mm)
Cutting Points	4" (100 mm)
Max Run Length in Series	46 ft (14 m)
PCB	2 oz Copper
LED Size	3528
Adhesive Type	3M VHB 4930
Ambient Temperature	-4°F to 104°F (-20°C to 40°C)
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Dimmable	Yes
IP Rating	IP20: Indoor, Dry Location

7 Year
Warranty



Ordering Code

Series

VL 10

Vital™

-

Color Temp.

30K: 3000K
50K: 5000K

-

Voltage

24V


-

Length

16FT
100FT

Example: VL10-30K-24V-16FT

Dimensions

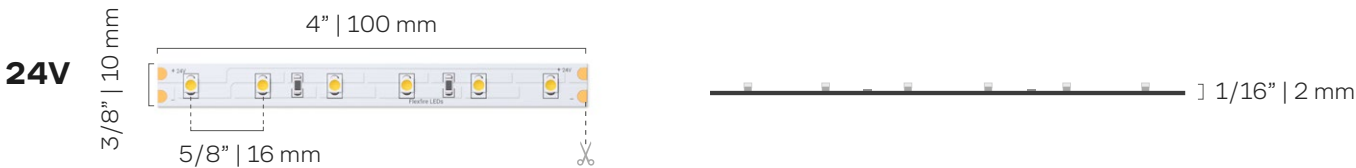

Product Specifications

Product SKU	Color* (CCT)	Watts/Foot (Meter)	Lumens/Foot (Meter)	Luminous Efficacy (Lumens/Watt)	CRI	Gamut Score (Rg)	Relative Fidelity Score (Rf)
VL10-30K	3000K	1.2 W/ft (3.9 W/m)	100 lm/ft (327 lm/m)	82	93	99	90
VL10-50K	5000K	1.2 W/ft (3.9 W/m)	95 lm/ft (313 lm/m)	80	95	99	89